


FRAMELESS GLASS PIVOT DOOR HARDWARE

FH-100 NHO
FH-100 HO




Product Image

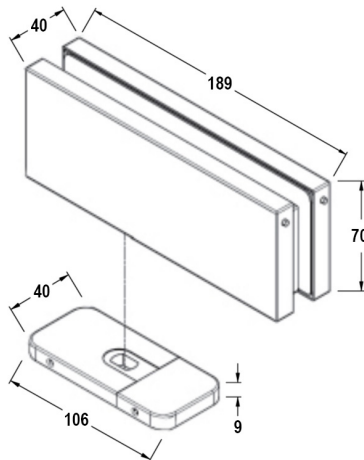

Dimensions

Where the radius corner meets the cutout the points should be tipped or R5

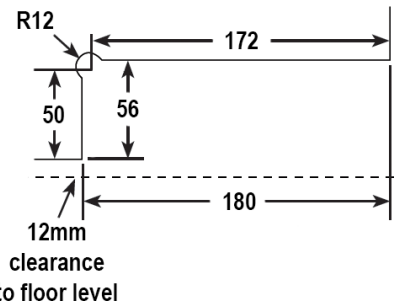

Glass Preparation

DETAILS

Standard Strength EN3 Ozone Hydraulic Patch Fitting

- Non hold open / Hold Open
- Suitable for 8mm-12mm toughened glass
- Maximum weight of 100kg with a maximum door width of 1000mm
- 12mm clearance to floor
- 5mm (FH5) & 10mm (FH10) Packers available

FINISHES

- Polished
- Satin

Base material:
Aluminium body
316 Stainless Steel Cover