
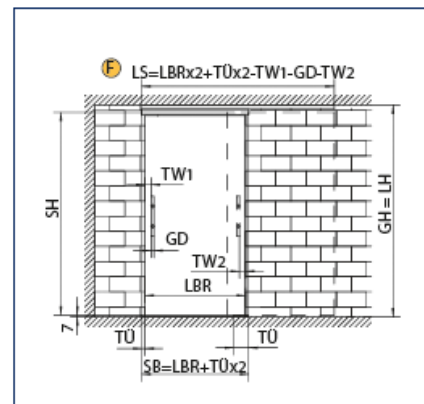
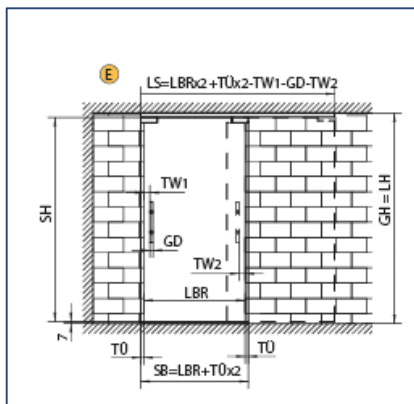


D = Perlan 140 with glass clamping plate, with pull handle, individually covered, without glass cut-outs, with ceiling connection (not recommended because of glass gap)

E = Perlan 140 with glass clamping plate, with pull handle, individually covered, with glass cut-outs, with ceiling connection

F = Perlan 140 with glass clamping plate, with pull handle, continuously covered, without glass cut-outs, with ceiling connection

Note: Position of the glass clamping plate changes if SoftStop is used

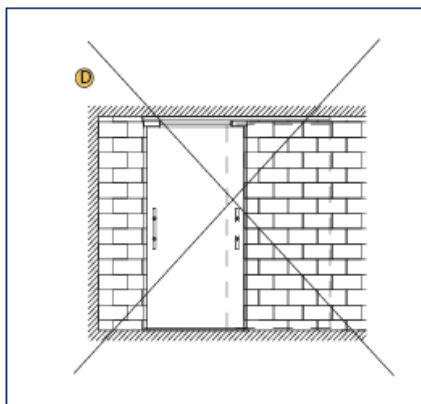

Dimensioning as with F

LS = Track length

LBR = Clear width

T0 = Door protrusion

TW1 = Door handle - wall clearance (door closed)

TW2 = Door handle - wall clearance (door opened)

GD = Diameter of handle bar

SH = Panel height


LH = Clear height

GH = Total height

SB = Panel width

Ceiling Installation Kit includes:

- 1 x 2450mm track
- 2 x double roller carriages
- 2 x black plastic track end caps
- 2 x tube buffers
- 1 x hold-open spring
- 2 x glass clamping plates with individual covers & black plastic end caps
- 1 x adjustable glass floorguide
- No handle included

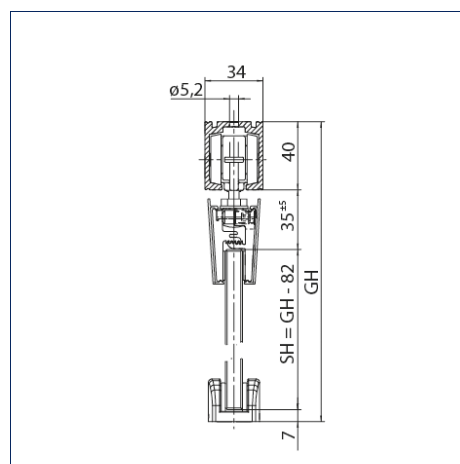

Direct ceiling mounting

SH = Panel height

GH = Total height

DETAILS

Geze Perlan 140

- 140kg weight capacity for 8/10/12mm toughened glass
- Suitable for door widths between 500 & 1240mm and various softstops
- See page 4.2b for recessed clamp glass preparation & clamp details
- Email manufactured@mfgs.com.au for custom length kits and those requiring continous clamp covers, track covers spacers, fixed panel profile, etc.
- For further information please refer to download section at www.mfgs.com.au

FINISHES

- Natural Anodised
- Satin Stainless Anodised

Base material:
Aluminium