



© Copyright

P 02 9522 3983

E customer.service@mfgs.com.au

www.mfgs.com.au



MODERN FRAMELESS  
GLASS SYSTEMS

# ONYX™ SQUARE CUT 5081

PERIMETER FRAMED SHOWER SCREEN SYSTEM WITH FRAMELESS HINGED DOOR

## CUTTING SHEET

**DESIGN CODE: 5081SC PF2FP2x45R**

JOB NO. \_\_\_\_\_ DATE \_\_\_\_ / \_\_\_\_ / \_\_\_\_


### CLIENT DETAILS

NAME: \_\_\_\_\_  
 ADDRESS: \_\_\_\_\_  
 PHONE NO: \_\_\_\_\_  
 EMAIL: \_\_\_\_\_

### PRODUCT DETAILS

APPLICATION: **NEO-ANGLE WITH 2 FIXED PANELS & 2 X 45° RETURNS**  
 PANEL TYPE: \_\_\_\_\_  
 COLOUR: \_\_\_\_\_  
 OTHER: \_\_\_\_\_

### SCHEMATIC

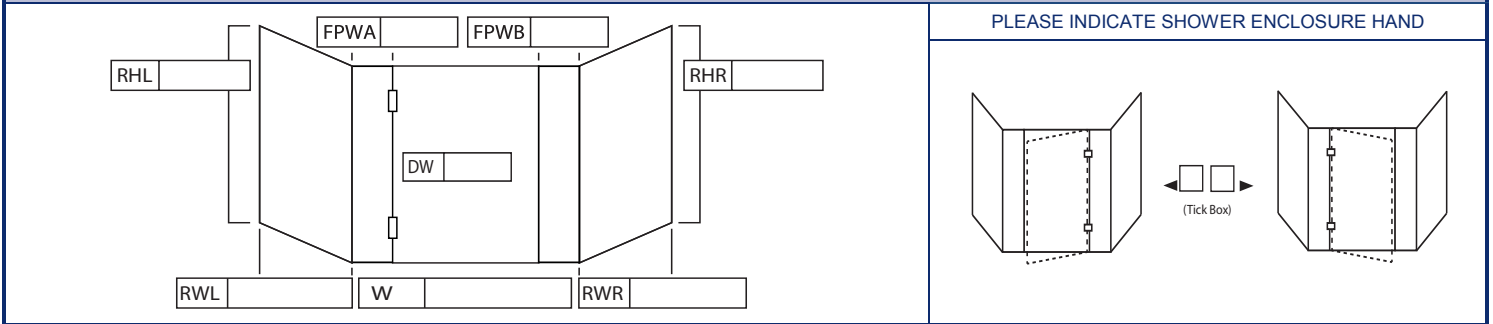

### CUTTING FORMULA HEIGHT GUIDE

	PRODUCT CODE	DESCRIPTION	QTY	CUTTING FORMULA	EXTRUSION LENGTH
RETURN PANELS	SE131	Head/Sill	1	RHL - 72	
	SE58	Wall Channel	1	RHL	
	SE131	Head/Sill	1	RHR - 72	
	SE58	Wall Channel	1	RHR	
<b>Note:</b> Square cut ends.					

### CUTTING FORMULA WIDTH GUIDE

	PRODUCT CODE	DESCRIPTION	QTY	CUTTING FORMULA	EXTRUSION LENGTH
FRONT	SE131	Head/Sill	2	W - 38	
<b>Note:</b> Square cut ends. Use smallest width dimensions.					
RETURN PANELS	SE131	Head/Sill	2	RWL - 63	
	SE131	Head/Sill	2	RWR - 63	
<b>Note:</b> Square cut ends. Use smallest width dimensions.					

### GLASS SPECIFICATION GUIDE

	DIMENSIONS	QTY	FORMULA	SPEC
DOOR	Height	1	H - 75	
	Width	1	DW	
<b>Note:</b> Door width as required. All edges to be flat polished.				
RETURN PANELS	Height	1	RHL - 38	
	Width	1	RWL - 32	
	Height	1	RHR - 38	
RETURN PANELS	Width	1	RWR - 32	
	<b>Note:</b> On each return panel, one vertical edge back mitre at 22.5° and flat polish.			
FIXED PANEL A	Height	1	H - 38	
	Width	1	W - DW - FPWB - 6	
<b>Note:</b> Cut out edge to be flat polished. Vertical long edge back mitre at 22.5° and flat polish.				
FIXED PANEL B	Height	1	H - 38	
	Width	1	W - DW - FPWA - 6	
<b>Note:</b> One vertical edge back mitre at 22.5° and flat polish.				

### SPECIAL NOTES

- Refer to glass preparation and dimension guide.
  - Silicone butt joints required.
  - All deductions are for outer shower finished size point-to-point.
  - Assumes use of 6mm toughened glass.
  - Include 8mm hole on door glass for handle.
- Note:** If **SEBWS: Bulb Water Seal** required amend fixed panels from - 6 to - 10.