

FRAMELESS GLASS SLIDING DOOR SYSTEMS INDEX

- 4.1 Geze Levolan 60**
 - 4.1.1 GCC BRISA 160**
- 4.2 Geze Rollan 80**
- 4.3 Modern Tube Slider**
 - 4.3.1 ORG100 BRIO Open Round Rail Glass Slider**
- 4.4 Valencia 120**
- 4.5 Geze Levolan 120**
- 4.6 Geze Perlan 140**
- 4.7 GCC RS150**
- 4.8 Sadev Medium/Strong**
- 4.9 Geze Levolan 150**
- 4.10 Metro Glass Glide**
- 4.11 Metro Linear 100**
- 4.12 Metro MRS100/200**
- 4.13 Metro Linear 153**
- 4.14 Metro MF100/180/250**
- 4.15 Patch Locks, Finger Pulls & Flush Pulls**



INTENTIONALLY

LEFT


BLANK

FRAMELESS GLASS SLIDING DOOR SYSTEMS

Geze Levolan 60

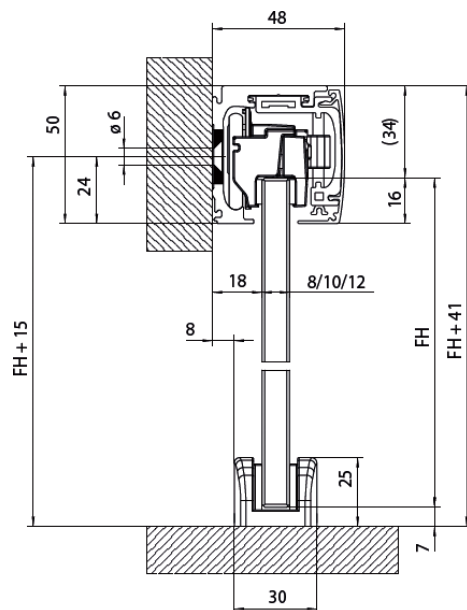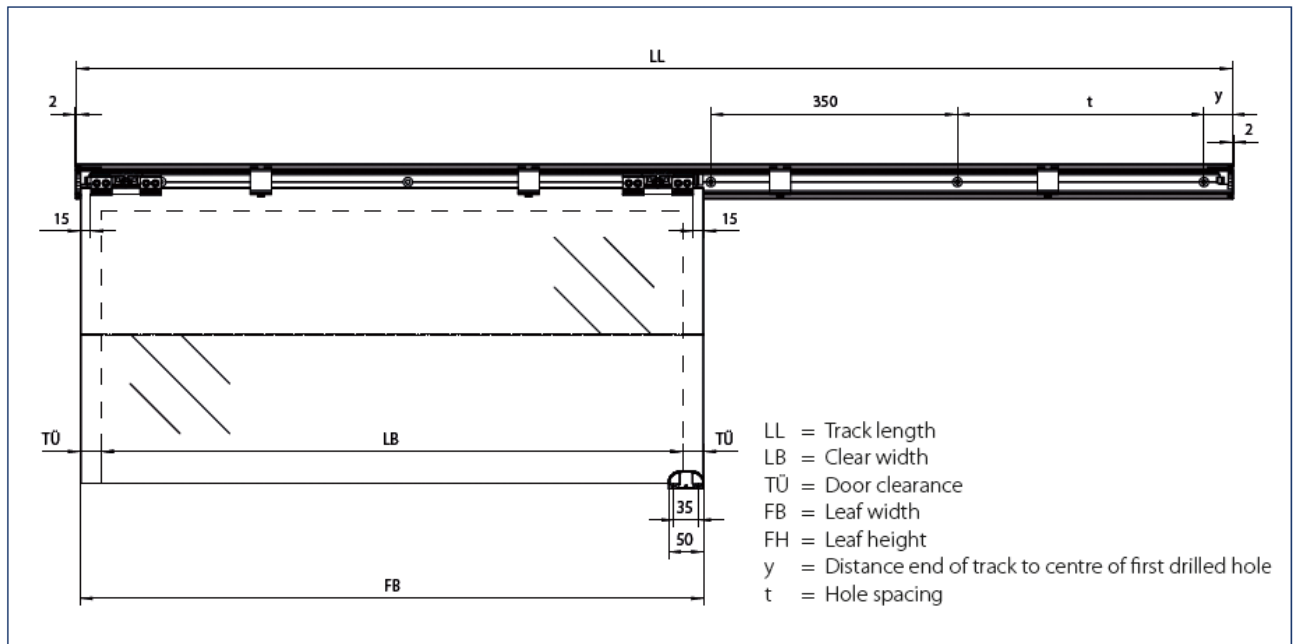

**Wall Installation
(GL60-2450)**

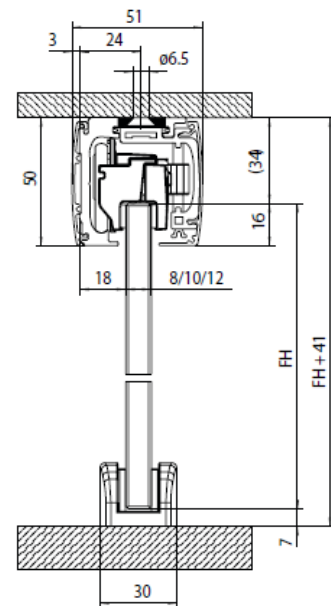

**Ceiling Installation
(GL60-2450 + GLBC-2850)**

DETAILS

Geze Levolan 60

- 60kg weight capacity for 8/10/12mm toughened glass
- Suitable for door widths between 400 & 1240mm
- See page 4.1b for GL60-2450 kit inclusions & softstop details
- Email luke.pritchard@mfgs.com.au for custom length kits including those requiring glass mounting, spacer and/or fixed panel profile.
- For further information please refer to download section at www.mfgs.com.au

FINISHES


- Natural Anodised
- Satin Stainless Anodised

Base material:
Aluminium


Geze Levolan 60**FRAMELESS GLASS SLIDING DOOR SYSTEMS**

GL60-2450 Wall Installation Kit Includes:

- 1 x 2450mm track & front cover profile
- 2 x roller carriages
- 2 x buffers
- 2 x end covers
- 1 x adjustable floor guide
- No handle included

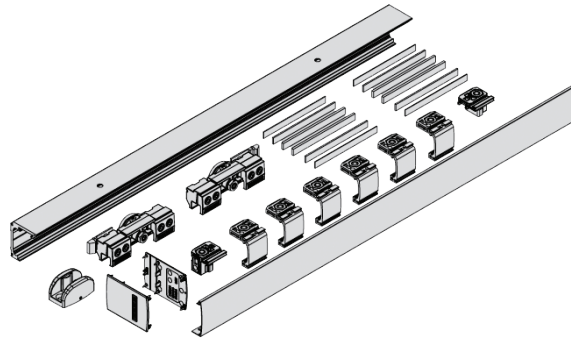


Draw-in damping on one side

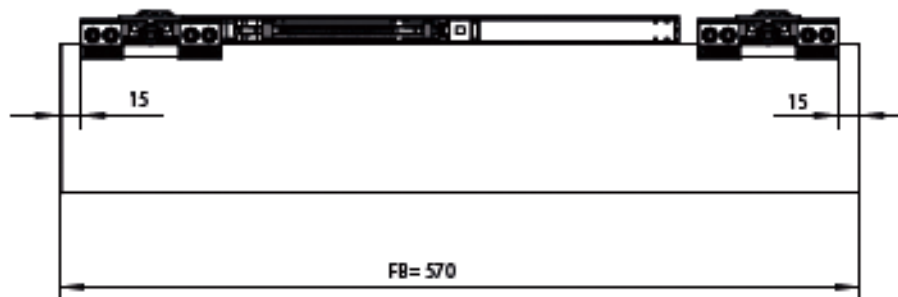

FB = Leaf width (min)

Draw-in damping on both sides

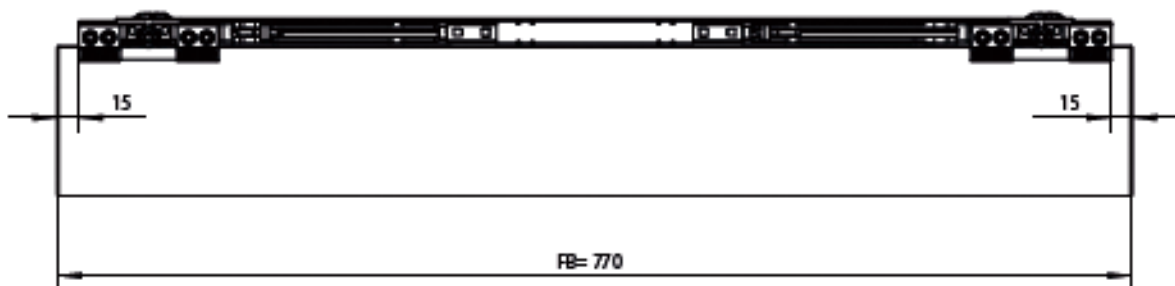



FB = Leaf width (min)

FRAMELESS GLASS SLIDING DOOR SYSTEMS
GCC BRISA-160

W : total panel's width

D : Distance from the glass edge to the clamp

$$D = (W - 678\text{mm}) / 2$$

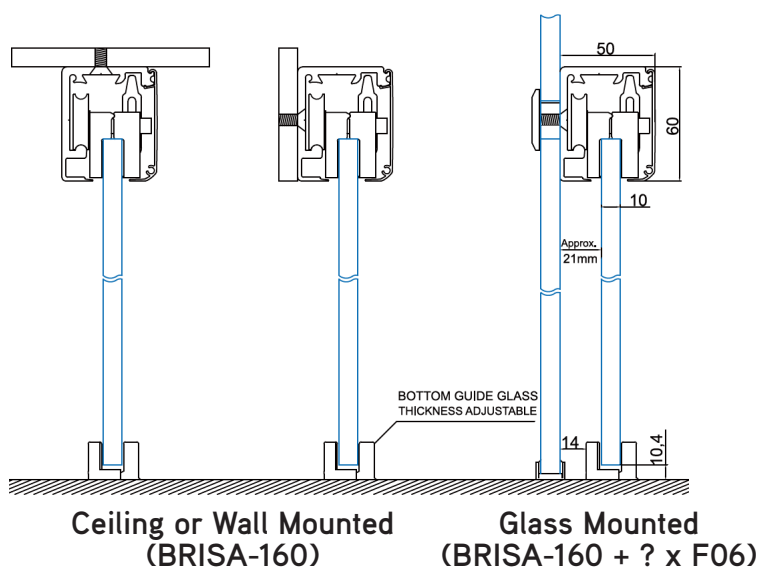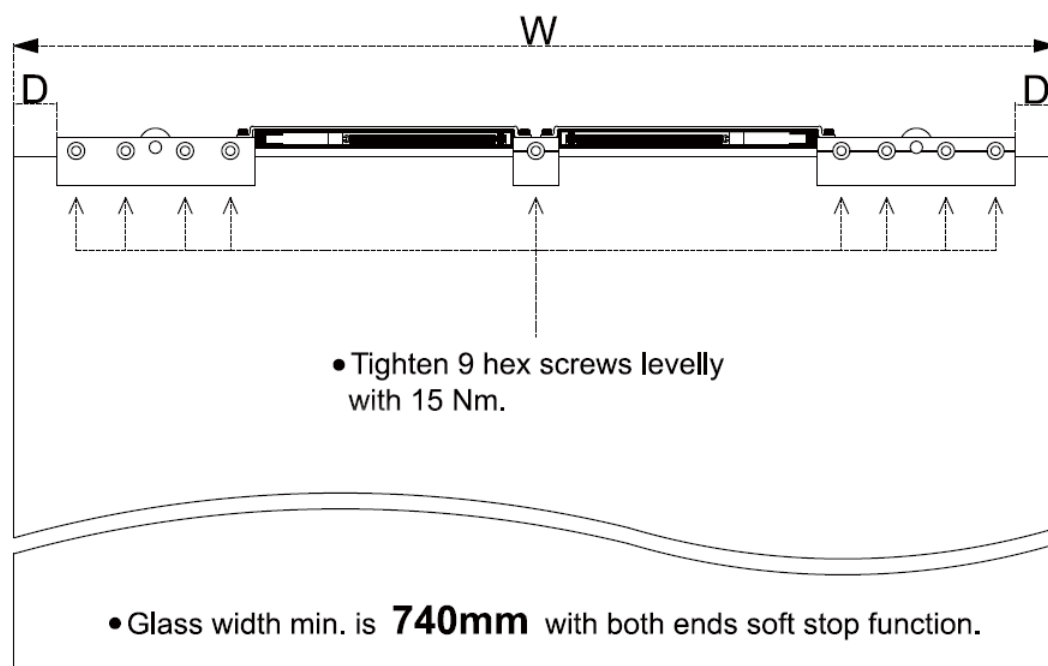

BRISA-160 Wall/Ceiling Kit Includes:

- 1 x 2400mm track & front cover
- 2 x Glass clamp rollers
- 2 x Soft stoppers
- 2 x Anti-bump & Active devices
- 2 x End caps
- 1 x Adjustable floor guide
- No handle included

Add up to 5 x F06 for glass mounting

DETAILS
GCC BRISA-160

- 60kg weight capacity for 10mm toughened glass
- Wall and ceiling mounted using std kit or glass mounted with addition of up to 5 x F06 fixings
- Suitable for min. door width of 740mm & max. 1200mm using 2400mm track
- See page 4.1d for BRISA-160 anti-bump details
- For installation manual refer to download section at www.mfgs.com.au


FINISHES

- Natural Anodised

Base material:
Aluminium


GCC BRISA-160

FRAMELESS GLASS SLIDING DOOR SYSTEMS

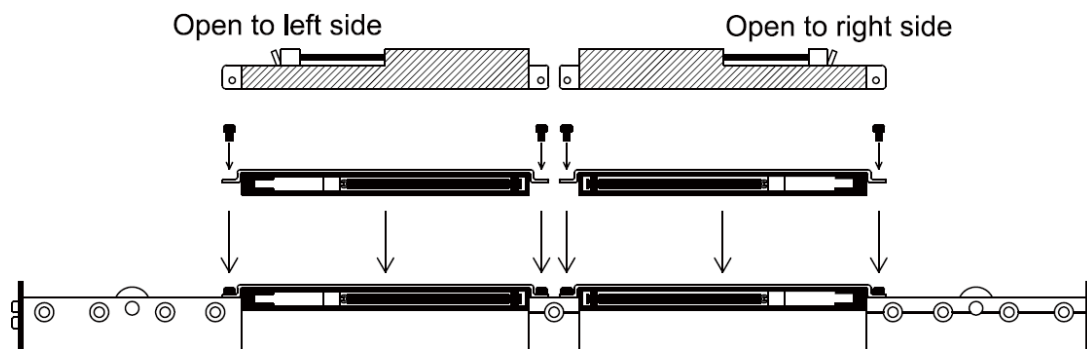

FRAMELESS GLASS SLIDING DOOR SYSTEMS


Geze Rollan 80

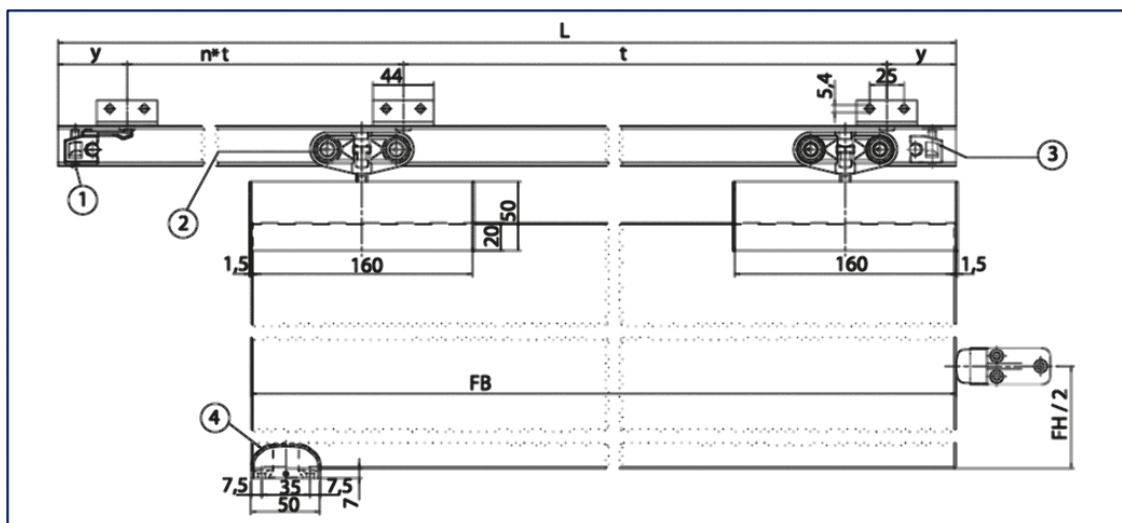


- 1 = Tube buffer adjustable with hold-open device in the track
- 2 = Double roller carriage
- 3 = Tube buffer adjustable in the track
- 4 = Infinitely adjustable glass floor guide
- L = Track length
- y = Distance end of track to centre of first drilled hole
- n = Installation of individual wall brackets with wooden leaf
- t = Hole spacing
- FB = Leaf width
- FH = Leaf height

GR1900 Wall/Ceiling Installation Kit Includes:


- 1 x 1900mm track
- 2 x roller carriages
- 2 x 45mm Clamping Plates with NA Covers
- 2 x tube buffers
- 5 x Wall/Ceiling Bkts
- 1 x adjustable floor guide
- No handle included

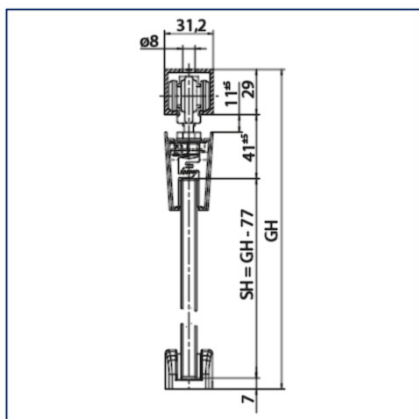

Direct ceiling mounting
SH = Panel height
GH = Total height

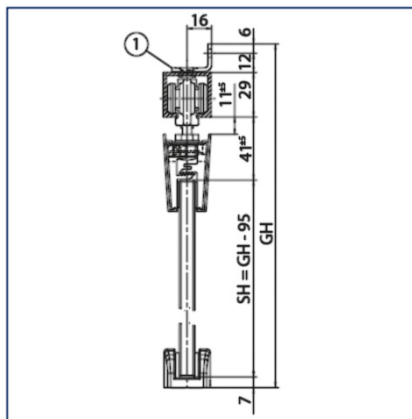

Wall mounting with angle
1 = Wall installation
SH = Panel height
GH = Total height

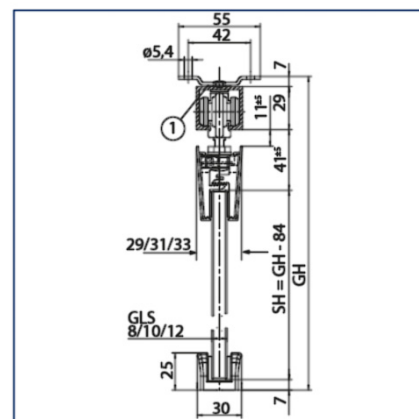

Ceiling installation with plate
1 = Ceiling fixing plate
GLS = Thickness of glass
SH = Panel height
GH = Total height

Dimensions & Glass Preparation

DETAILS

GR1900 - Geze Rollan 80 kit

- 80kg weight capacity for 8/10/12mm toughened glass. 40kg Softstop rating
- Suitable for door widths between 500 & 970mm
- See page 4.2b for recessed clamp glass preparation & clamp details
- Email luke.pritchard@mfgs.com.au for custom length kits including those requiring spacer and/or fixed panel profile.
- For further information please refer to download section at www.mfgs.com.au

FINISHES


- Mill Track
- Natural Anodised Clamp Covers

Base material:
Aluminium

Geze Rollan 80

FRAMELESS GLASS SLIDING DOOR SYSTEMS

For example with glass leaves (glass with edge recesses), 1-sided, short, damping in one direction:

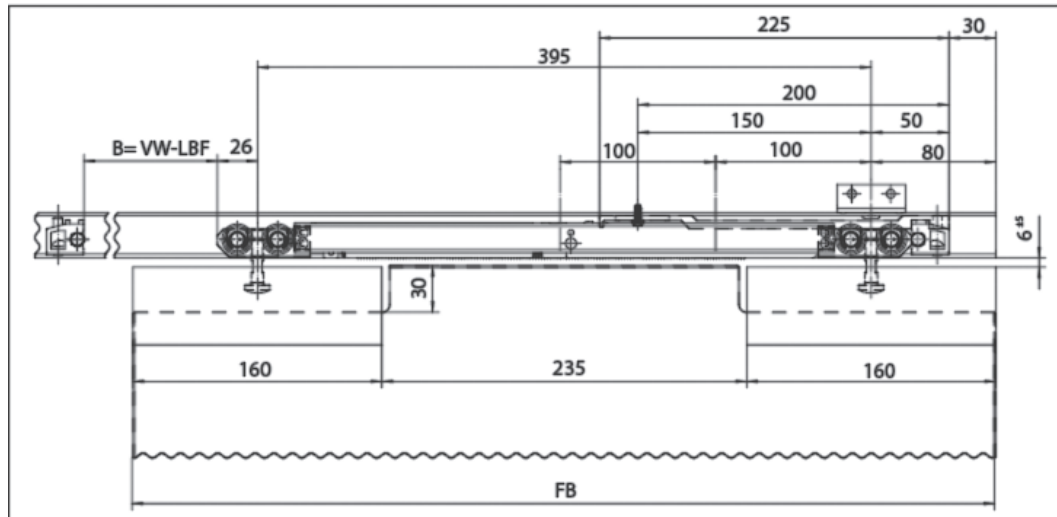


VW = Range of movement


LBF = Length of floor guide

FB = Recommended leaf width 550 - 880 mm


Dimensions & Glass Preparation

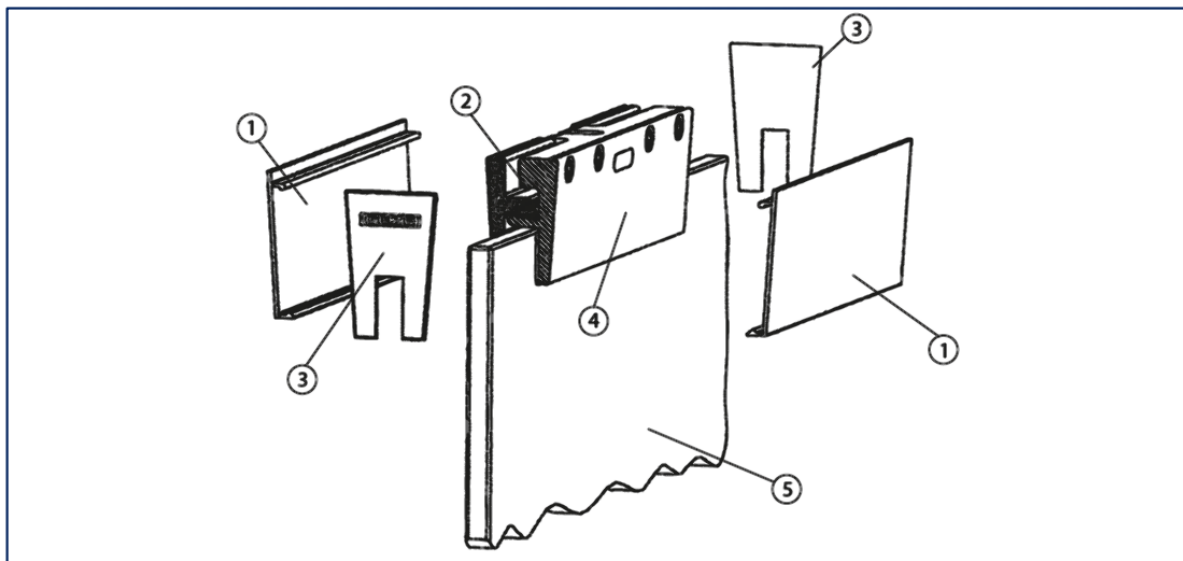

- 1 = Cover profile
- 2 = Inside gearing
- 3 = End cover
- 4 = Glass clamping plate
- 5 = Glass pane

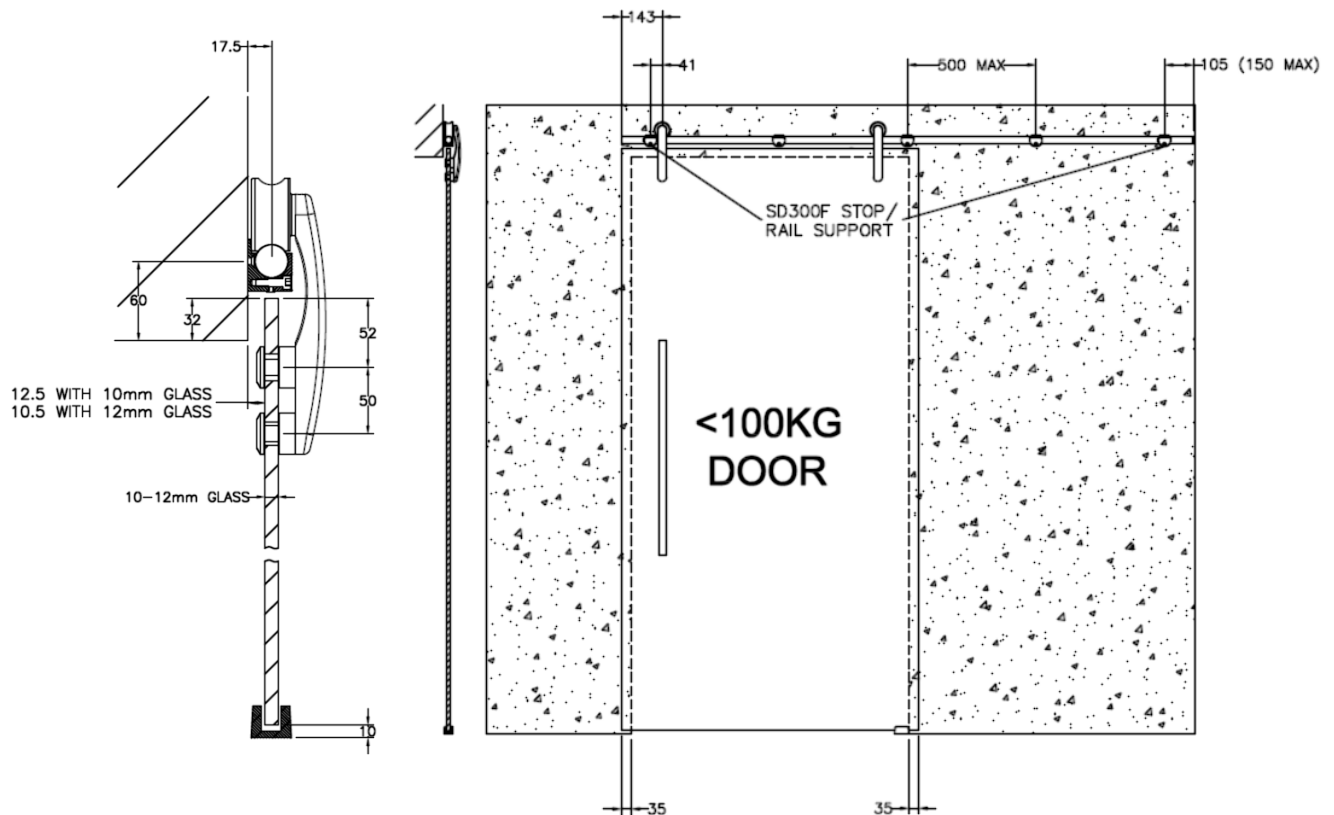FRAMELESS GLASS SLIDING DOOR SYSTEMS
MTSW2450


Dimensions & Glass Preparation

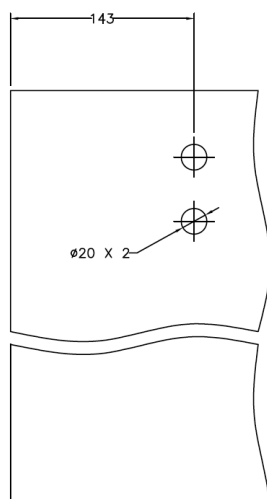

Glass Preparation - Carriage

Wall Installation Kit Includes:

- 1 x 2450mm x Ø25mm Tube
- 2 x Carriages
- 2 x End Caps
- 3 x Wall Mounted Bkts
- 2 x Wall Mounted Stops
- 1 x Adjustable Floor Guide
- 1 x Snake Eye Spanner
- No handle included




DETAILS
MTSW2450 - Modern Tube Slider Wall Installation Kit

- 100kg weight capacity for 10/12mm toughened glass
- Alternative stops available, see price list
- Email luke.pritchard@mfgs.com.au for custom length kits including those requiring spacer and/or fixed panel profile.
- For further information please refer to download section at www.mfgs.com.au

FINISHES

- Satin


 Base material:
316 Stainless Steel

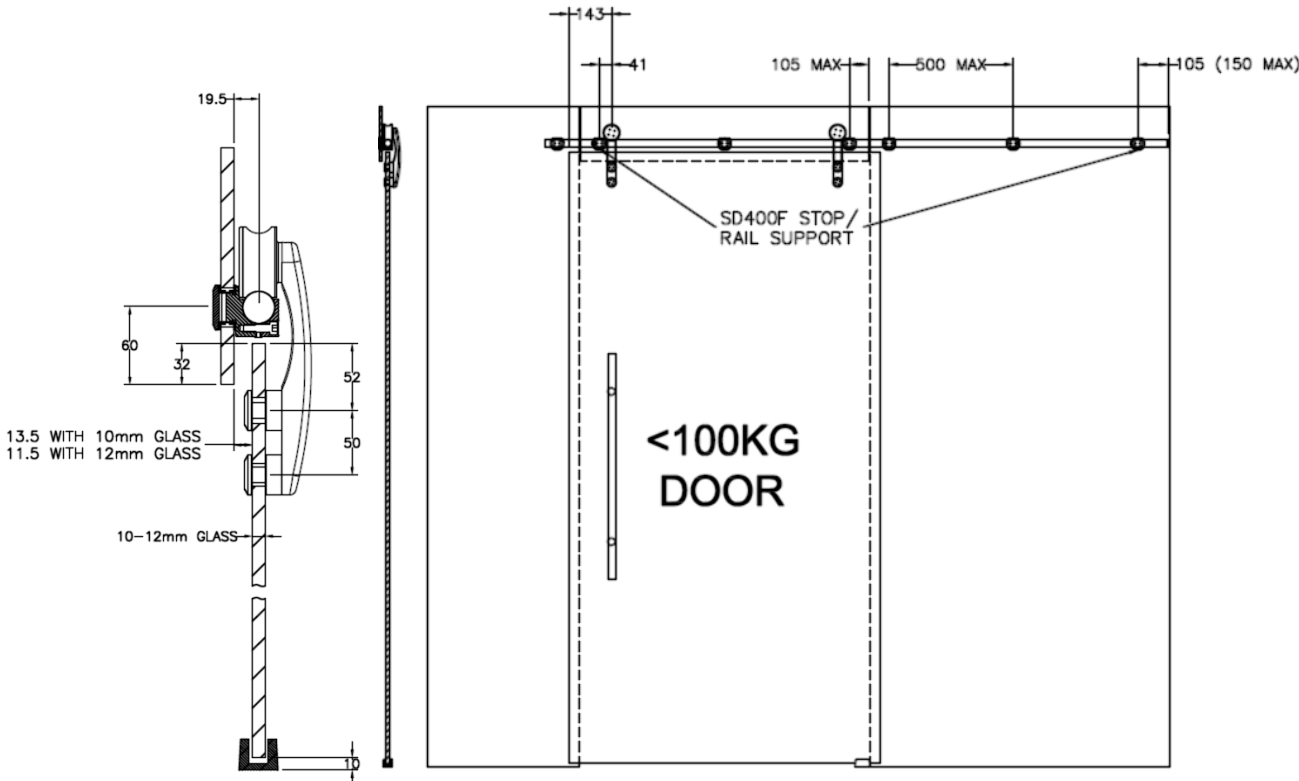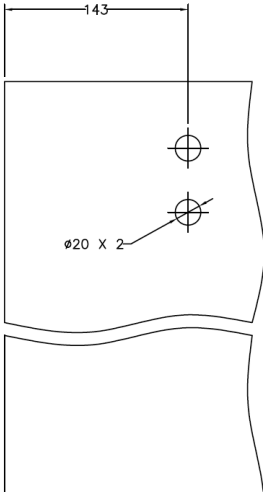MTSG2450		FRAMELESS GLASS SLIDING DOOR SYSTEMS	
<div><div></div><div>Dimensions & Glass Preparation</div></div>			
<div></div> <div>Glass Preparation - Carriage</div>	<div></div> <div>Glass Preparation - Glass Mount</div>	<div>Glass Installation Kit Includes:</div> <ul style="list-style-type: none">• 1 x 2450mm x Ø25mm Tube• 2 x Carriages• 2 x End Caps• 5 x Glass Mounted Bkts• 2 x Glass Mounted Stops• 1 x Adjustable Floor Guide• 1 x Snake Eye Spanner• No handle included	
<div>DETAILS</div> <div>MTSG2450 - Modern Tube Slider Glass Installation Kit</div> <ul style="list-style-type: none">• 100kg weight capacity & suitable for 10/12mm toughened glass• Alternative stops available, see price list• Email luke.pritchard@mfgs.com.au for custom length kits including those requiring spacer and/or fixed panel profile.• For further information please refer to download section at www.mfgs.com.au		<div>FINISHES</div> <ul style="list-style-type: none">• Satin <div>Base material: 316 Stainless Steel</div>	


FRAMELESS GLASS SLIDING DOOR SYSTEMS
ORG100

PANEL THICKNESS	MAX AREA	MAX HEIGHT	MAX WIDTH *
8mm (20kg/m ²)	5m ²	3m	1.7m
10mm (25kg/m ²)	4m ²	3m	1.3m
12mm (30kg/m ²)	3.3m ²	3m	1.1m


* MAX WIDTH INCREASE AS HEIGHT INCREASES

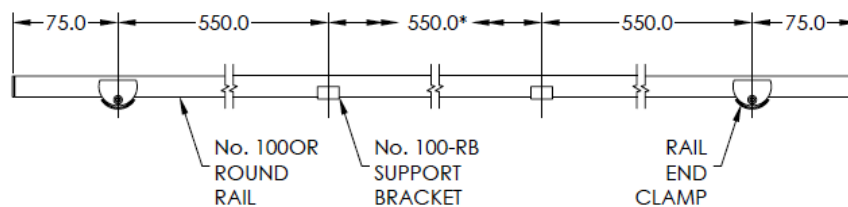


RAIL LENGTH	*ADDITIONAL No. 100-RB REQUIRED
2500mm	1
3000mm	2
4000mm	4



LINE UP PIP TO GLASS THICKNESS
REQUIRED THEN INSERT



* 13.5mm UNAVAILABLE FOR THIS SYSTEM

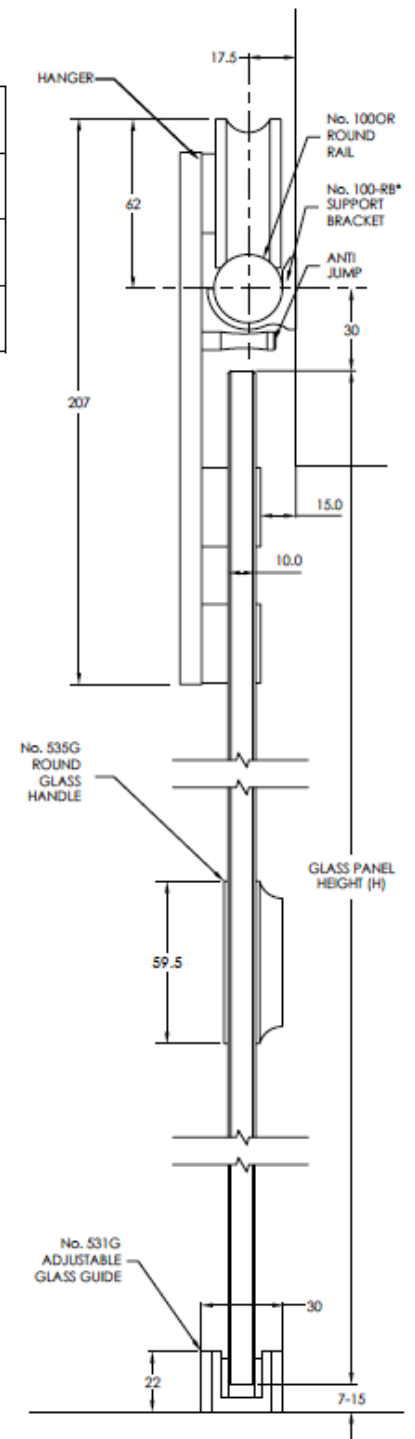
Dimensions
DETAILS
ORG100 - Brio Open Round Rail Glass

- 100kg weight capacity for 8/10/12mm toughened glass
- Standard length rails 2000/2500/3000/4000mm
- Email manufactured@mfgs.com.au for custom length kits
- For Glass Preparation see 4.3.1b
- For further information please refer to download section at www.mfgs.com.au


FINISHES

- Satin
- PVD Black


Base material:
304 Stainless Steel

ORG100


FRAMELESS GLASS SLIDING DOOR SYSTEMS

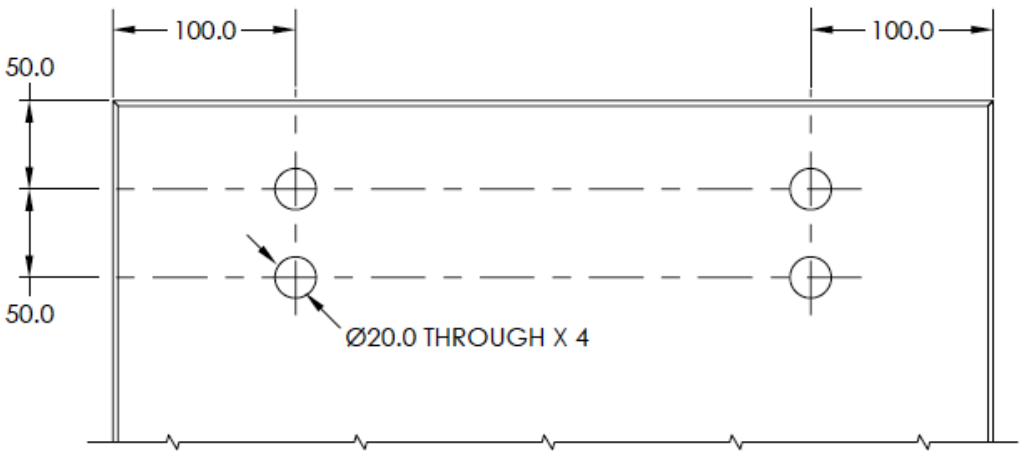


Glass Preparation - Carriage

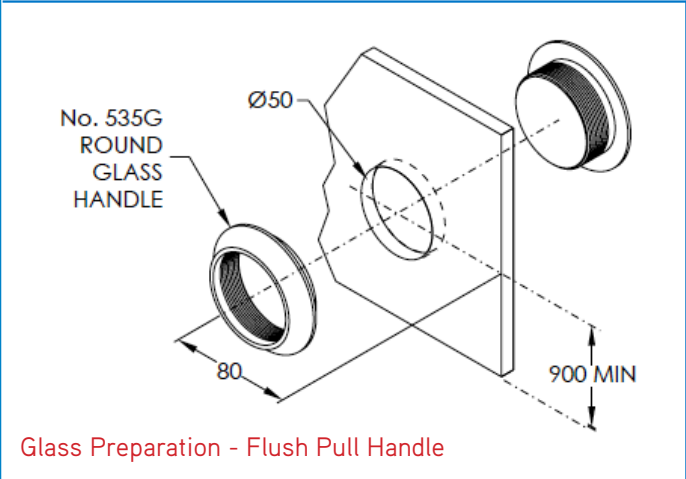

Glass Preparation - Flush Pull Handle

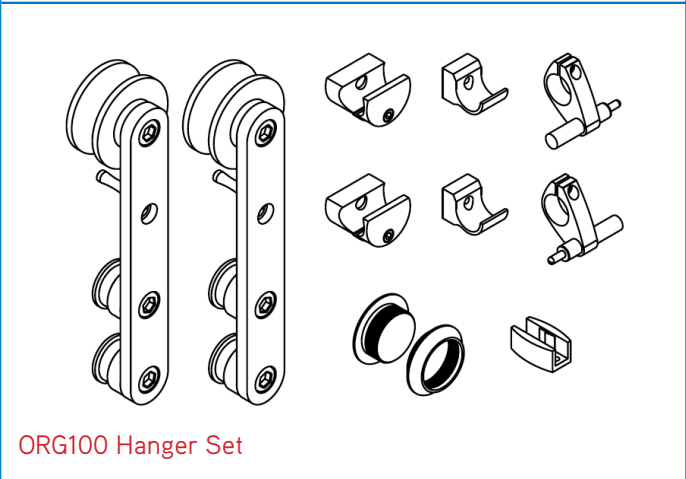


ORG100 Hanger Set

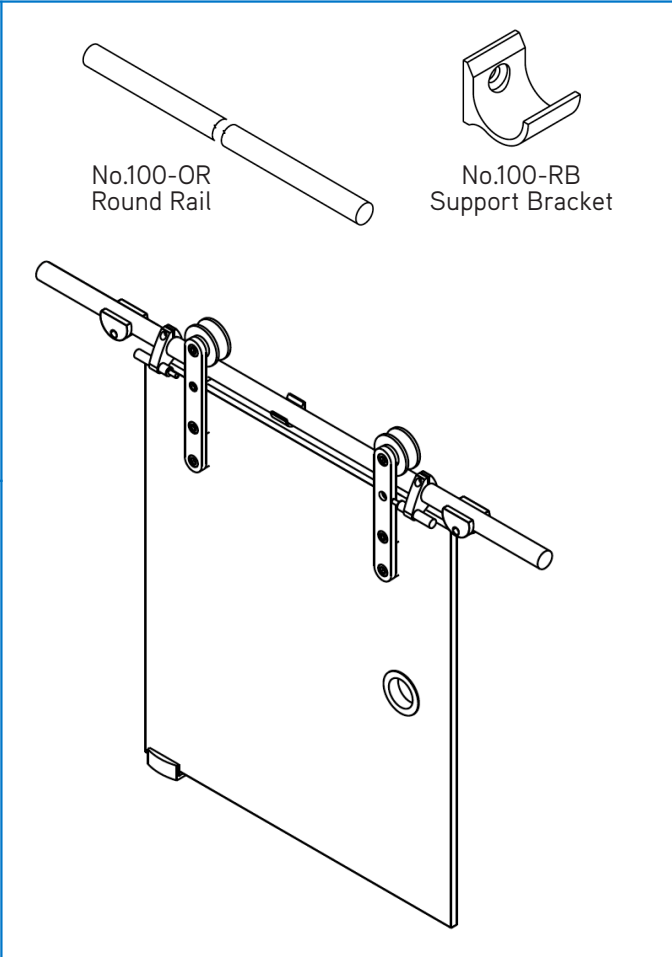

DETAILS	FINISHES
<p><u>ORG100 - Brio Open Round Rail Glass</u></p> <ul style="list-style-type: none">100kg weight capacity for 8/10/12mm toughened glassStandard length rails 2000/2500/3000/4000mmHandle only available in Stainless Steel finishEmail manufactured@mfgs.com.au for custom length kitsFor further information please refer to download section at www.mfgs.com.au	<ul style="list-style-type: none">SatinPVD Black <p>Base material: 304 Stainless Steel</p>

FRAMELESS GLASS SLIDING DOOR SYSTEMS

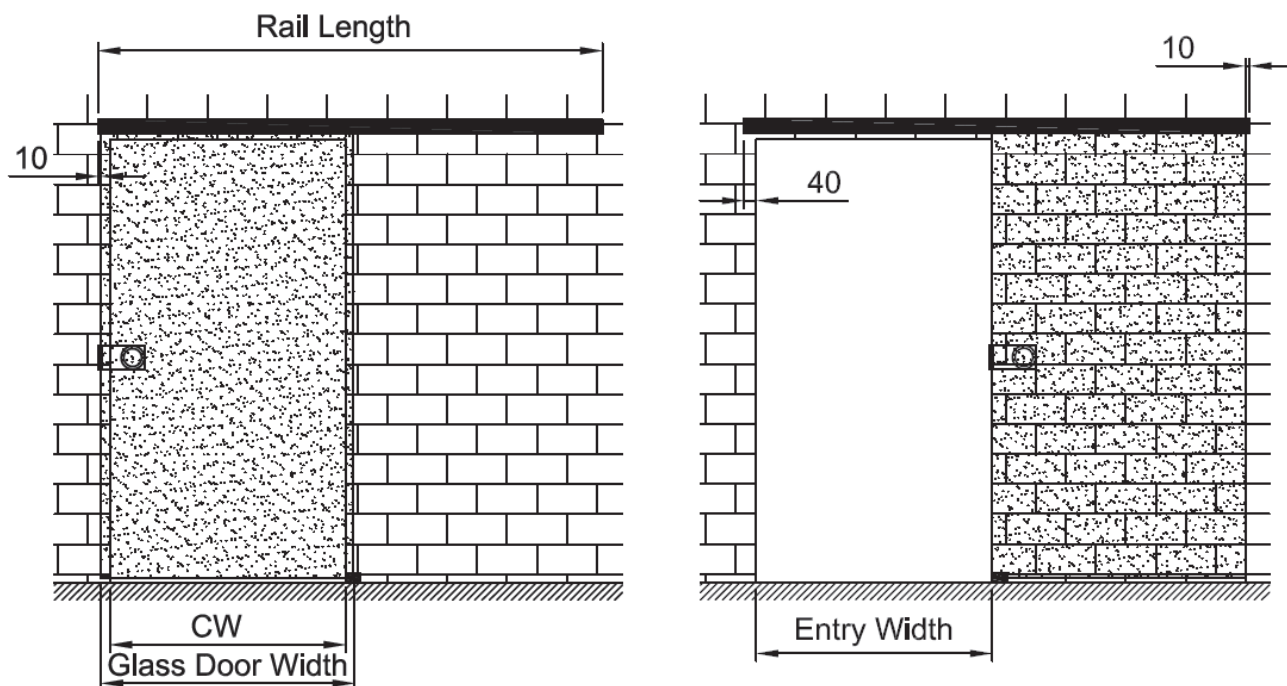
DL120-2000


Standard Rail Length 2000mm
CW = Clear Opening Width
Rail Length = (2 x CW) + 110

CW MAX = 945mm
Glass Door Width = CW + 60
Entry Width = CW


Elevations

Dimensions & Glass Preparation

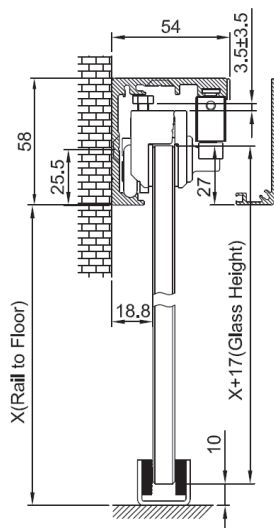

Wall Installation

Dimensions & Glass Preparation

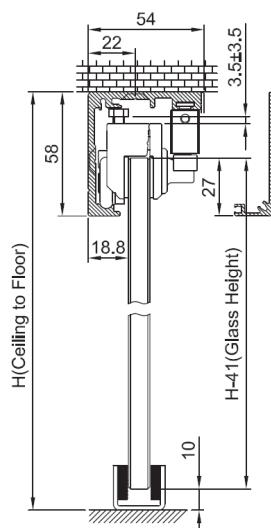

Ceiling Installation

Dimensions & Glass Preparation

Wall/Ceiling Installation Kit Includes:

- 1 x 2000mm track & cover profile
- 2 x roller carriages
- 2 x end caps
- 2 x stoppers
- 2 x self-closing mechanisms
- 1 x bottom guide
- No handle included

DETAILS

Valencia 120

- 120kg weight capacity for 10/12mm glass
- For installation instructions please refer to download section at mfgs.com.au



FINISHES

- Satin Stainless Anodised


Base material:
Aluminium

Geze Levolan 120

FRAMELESS GLASS SLIDING DOOR SYSTEMS

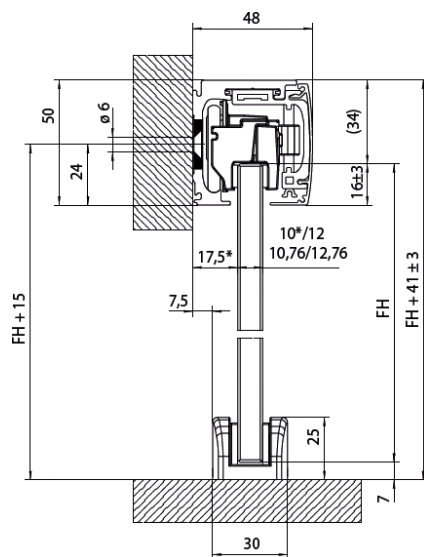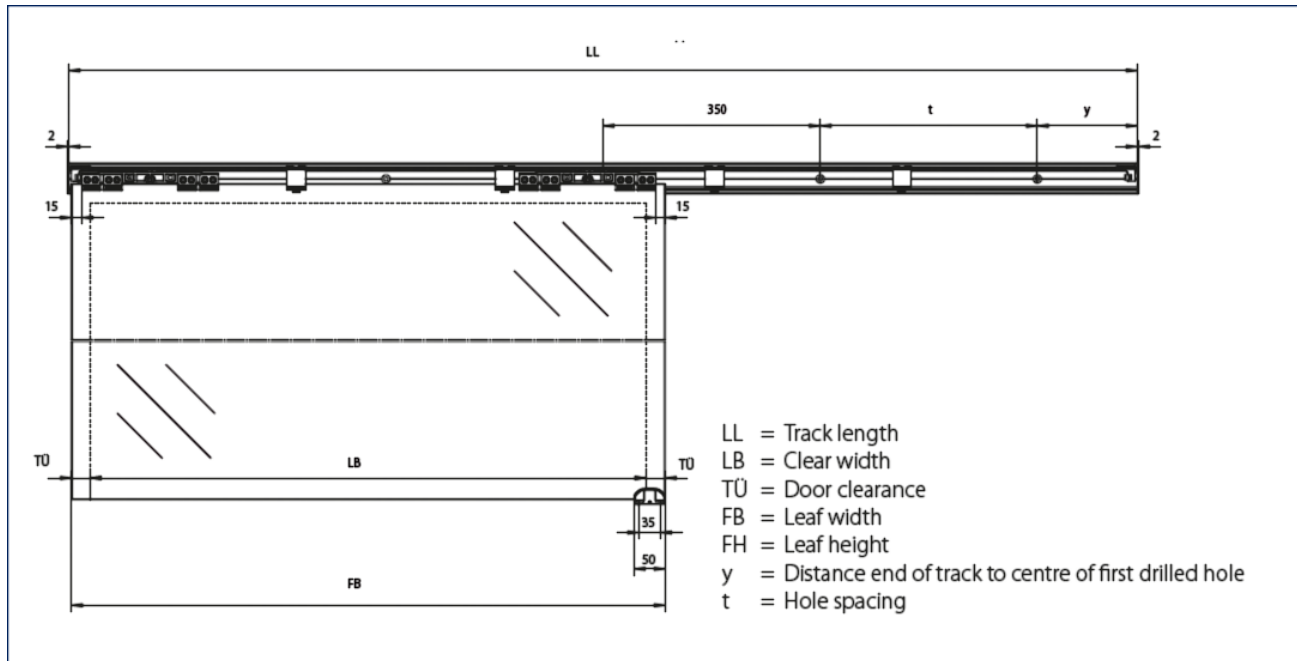

**Wall Installation
(GL120-2850)**

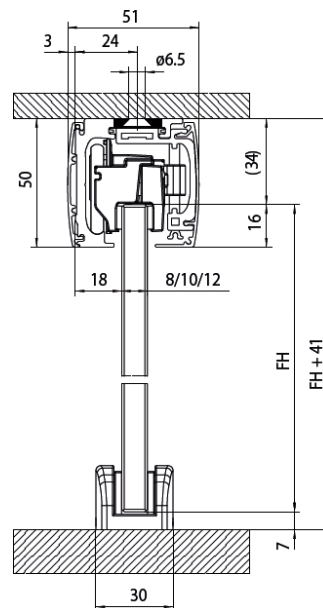

**Ceiling Installation
(GL120-2850 + GLBC-2850)**

DETAILS

Geze Levolan 120

- 120kg weight capacity for 8/10/12mm toughened glass
- Suitable for door widths between 640 & 1440mm
- See page 4.5b for GL120-2850 kit inclusions & softstop details
- Email luke.pritchard@mfgs.com.au for custom length kits including those requiring spacer and/or fixed panel profile.
- For further information please refer to download section at www.mfgs.com.au

FINISHES

- Natural Anodised
- Satin Stainless Anodised


Base material:
Aluminium

FRAMELESS GLASS SLIDING DOOR SYSTEMS


Geze Levolan 120

GL120-2850 Wall Installation Kit Includes:

- 1 x 2850mm track & front cover profile
- 2 x roller carriages
- 2 x buffers
- 2 x end covers
- 1 x adjustable floor guide
- No handle included

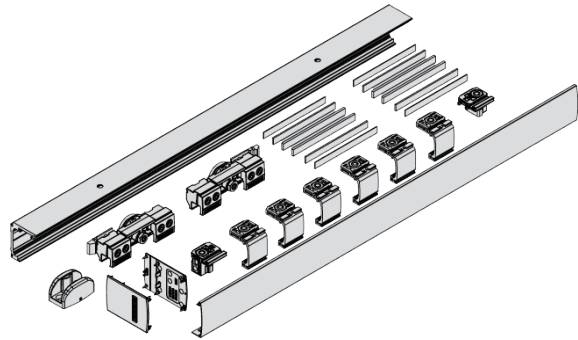


Draw-in damping on one side

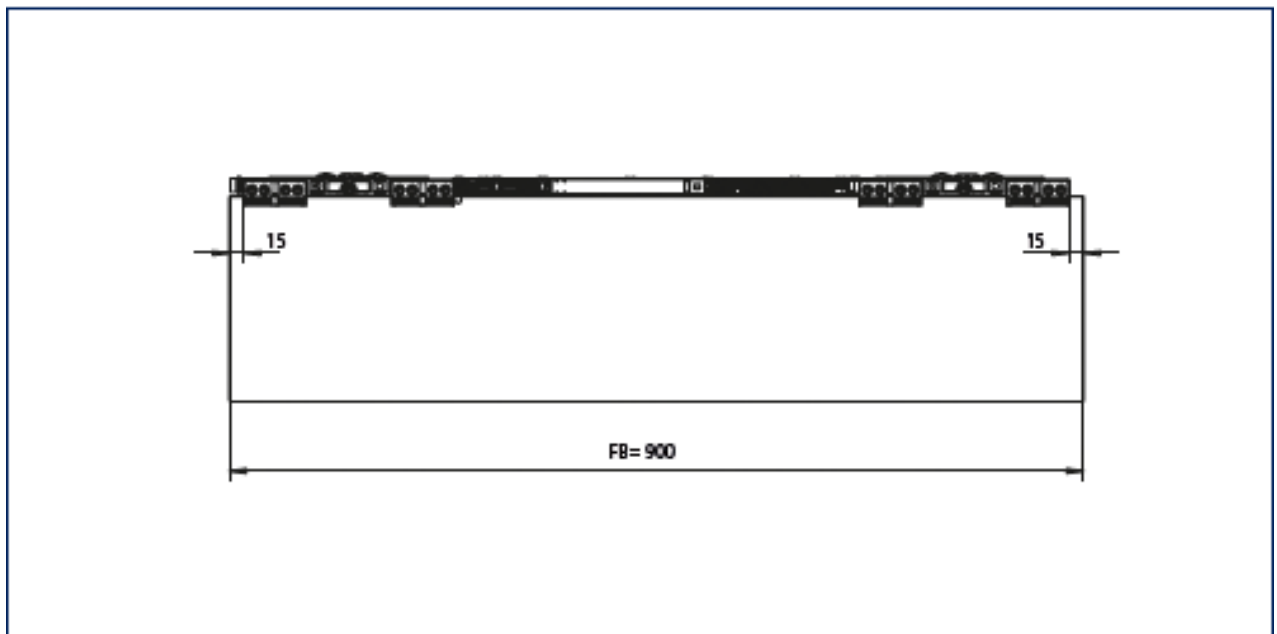



FB = Leaf width

Draw-in damping on both sides

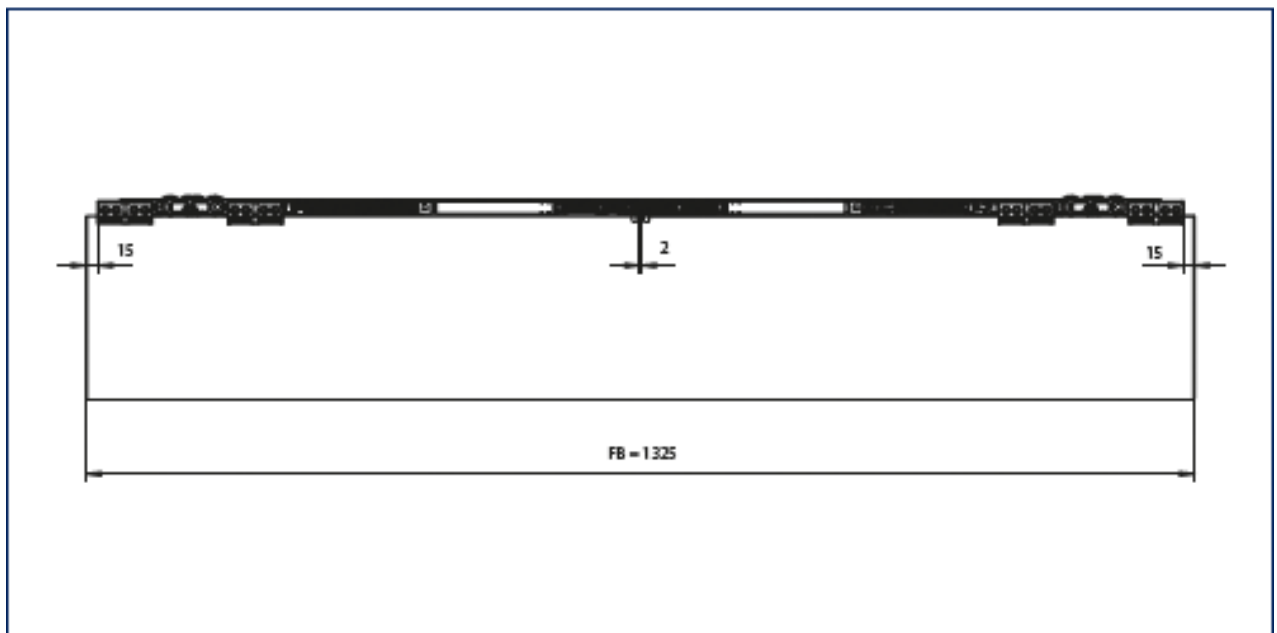

GPW2450

FRAMELESS GLASS SLIDING DOOR SYSTEMS

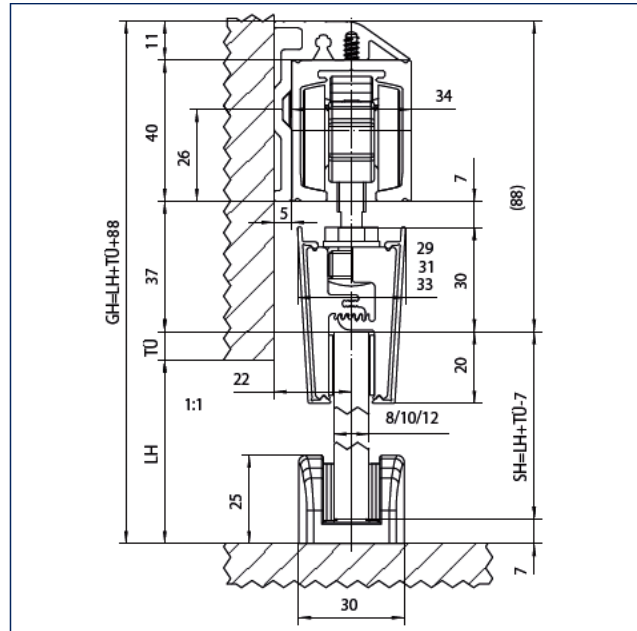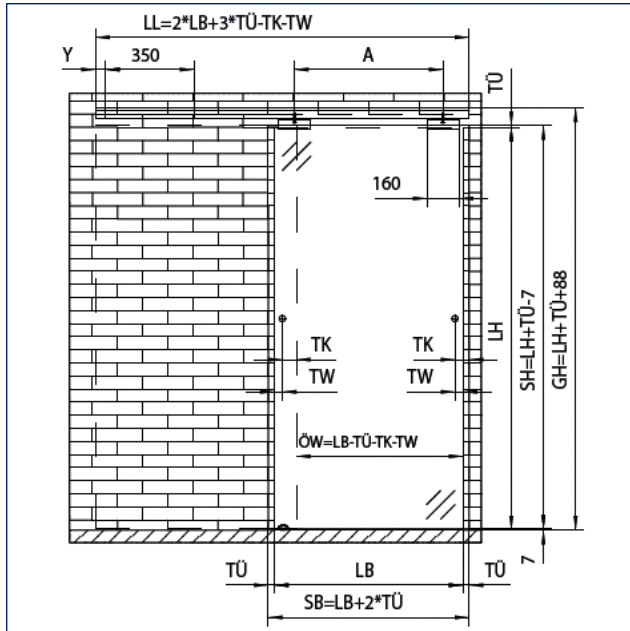

LL = Track length
 FB = Leaf width
 TK = Distance door handle to edge of leaf
 TW = Distance door handle to wall
 Y = Distance to first drill hole
 A = Distance between suspension bolts
 T \ddot{U} = Door clearance
 LH = Clear height
 LB = Clear width
 GH = Total height
 FH = Leaf height
 $\ddot{O}W$ = Opening width
 SH = Panel height

Wall Installation Kit Includes:

- 1 x 2450mm track
- 1 x concealed wall bracket
- 2 x double roller carriages
- 2 x end caps for concealed wall bracket & track
- 2 x tube buffers
- 1 x hold-open spring
- 2 x glass clamping plates with individual covers & black plastic end caps
- 1 x adjustable glass floorguide
- No handle included

DETAILS

Geze Perlan 140

- 140kg weight capacity for 8/10/12mm toughened glass
- Suitable for door widths between 500 & 1240mm and various softstops
- See page 4.2b for recessed clamp glass preparation & clamp details
- Email luke.pritchard@mfgs.com.au for custom length kits and those requiring continous clamp covers, track covers spacers, fixed panel profile, etc.
- For further information please refer to download section at www.mfgs.com.au

FINISHES

- Natural Anodised
- Satin Stainless Anodised

Base material:
Aluminium

FRAMELESS GLASS SLIDING DOOR SYSTEMS




GPC2450

D = Perlan 140 with glass clamping plate, with pull handle, individually covered, without glass cut-outs, with ceiling connection (not recommended because of glass gap)

E = Perlan 140 with glass clamping plate, with pull handle, individually covered, with glass cut-outs, with ceiling connection

F = Perlan 140 with glass clamping plate, with pull handle, continuously covered, without glass cut-outs, with ceiling connection

Note: Position of the glass clamping plate changes if SoftStop is used

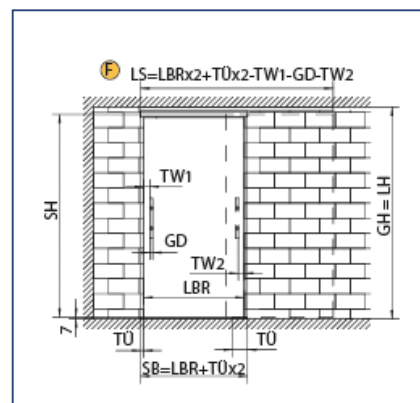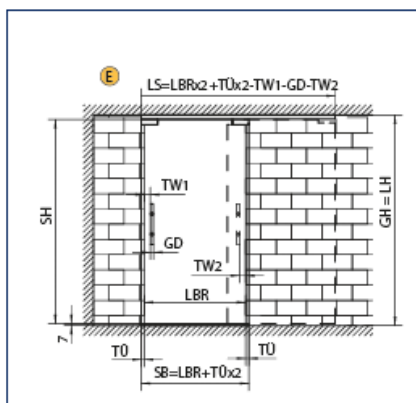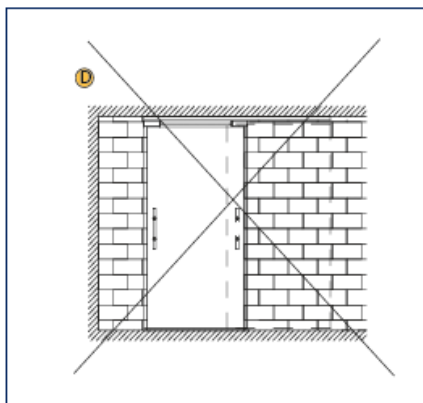


Dimensioning as with F

- LS = Track length
- LBR = Clear width
- TÜ = Door protrusion
- TW1 = Door handle - wall clearance (door closed)
- TW2 = Door handle - wall clearance (door opened)
- GD = Diameter of handle bar
- SH = Panel height
- LH = Clear height
- GH = Total height
- SB = Panel width

Ceiling Installation Kit includes:

- 1 x 2450mm track
- 2 x double roller carriages
- 2 x black plastic track end caps
- 2 x tube buffers
- 1 x hold-open spring
- 2 x glass clamping plates with individual covers & black plastic end caps
- 1 x adjustable glass floorguide
- No handle included

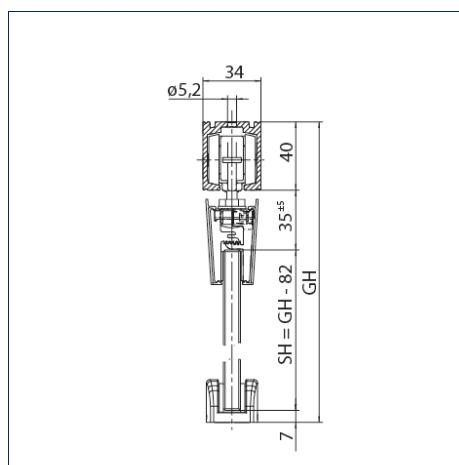

Direct ceiling mounting
SH = Panel height
GH = Total height

DETAILS





Geze Perlan 140

- 140kg weight capacity for 8/10/12mm toughened glass
- Suitable for door widths between 500 & 1240mm and various softstops
- See page 4.2b for recessed clamp glass preparation & clamp details
- Email luke.pritchard@mfgs.com.au for custom length kits and those requiring continous clamp covers, track covers spacers, fixed panel profile, etc.
- For further information please refer to download section at www.mfgs.com.au

FINISHES


- Natural Anodised
- Satin Stainless Anodised

Base material:
Aluminium

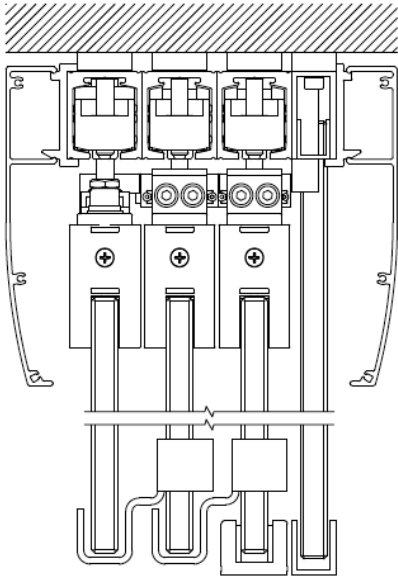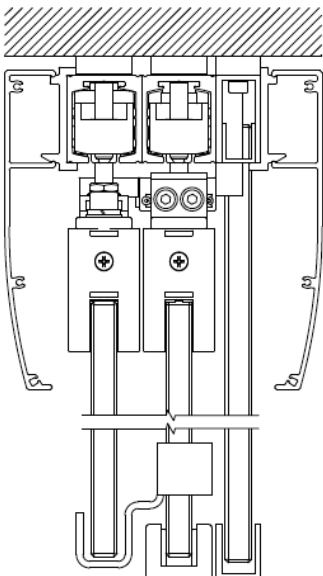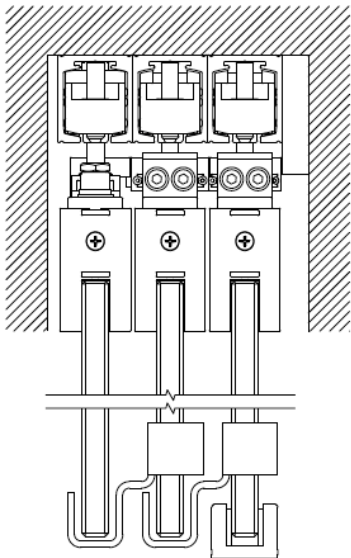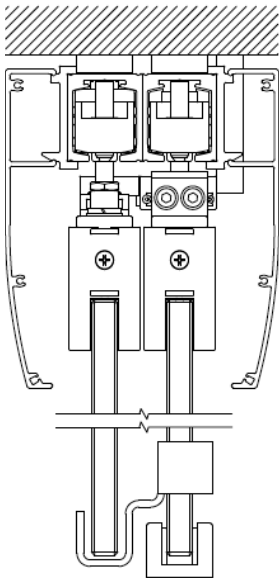MANEZE TELESCOPIC		FRAMELESS GLASS SLIDING DOOR SYSTEMS	
			
140-3-F (3 Leaf with Fixed Panel)		140-2-F (2 Leaf with Fixed Panel)	
			
140-3 (3 Leaf)		140-2 (2 Leaf)	
DETAILS		FINISHES	
<p>Maneze Telescopic</p> <ul style="list-style-type: none">• 140kg weight capacity for 10/12mm toughened glass• Pelmet is optional• Email manufactured@mfgs.com.au for custom length kits		<ul style="list-style-type: none">• Natural Anodised• Satin Stainless Anodised <p>Base material: Aluminium</p>	

FRAMELESS GLASS SLIDING DOOR SYSTEMS

MANEZE TELESCOPIC

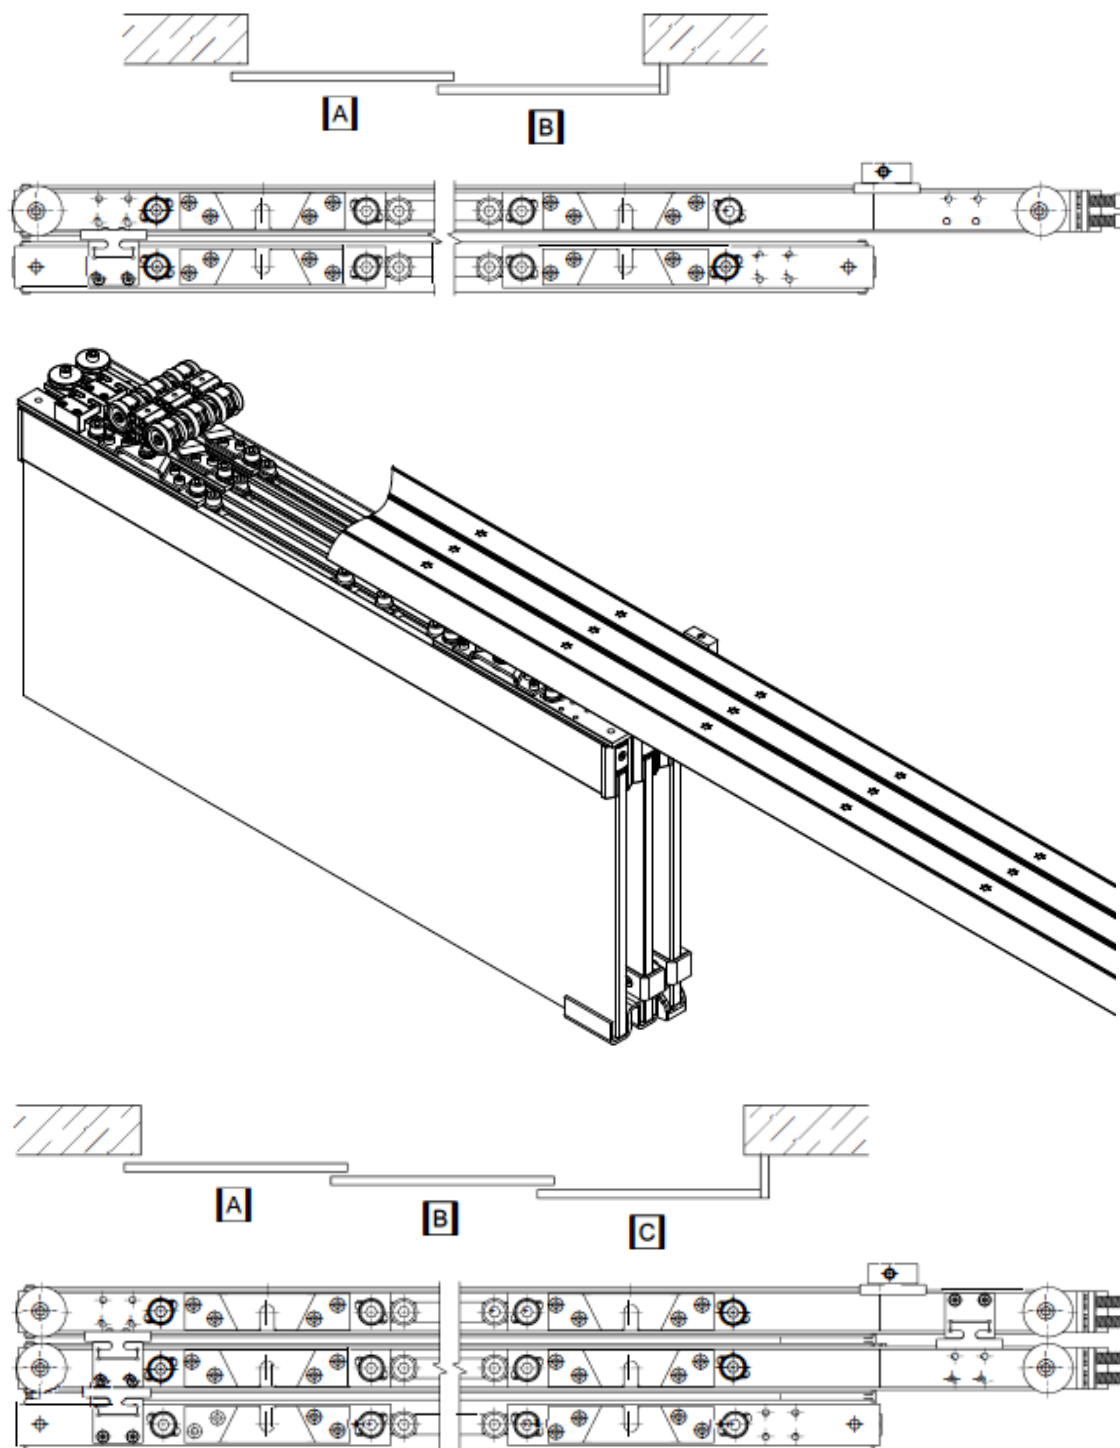

DETAILS

Maneze Telescopic

- 140kg weight capacity for 10/12mm toughened glass
- Email manufactured@mfgs.com.au for custom length kits


FINISHES

- Natural Anodised
- Satin Stainless Anodised

Base material:
Aluminium


RS150

FRAMELESS GLASS SLIDING DOOR SYSTEMS

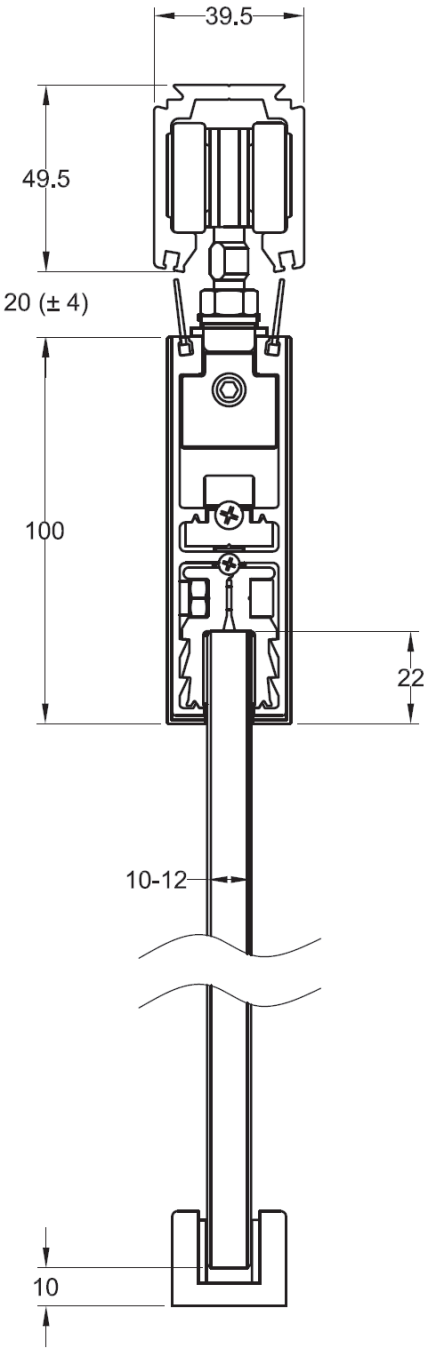

Ceiling Installation Kit includes:

- 1 x 3000mm track
- 2 x roller carriages
- 2 x end stop & holder
- 1 x 1500mm top sliding door rail - non locking
- 2 x 1500mm brush seals
- 1 x bottom guide
- 1 x glass floorguide
- No glass or handle included

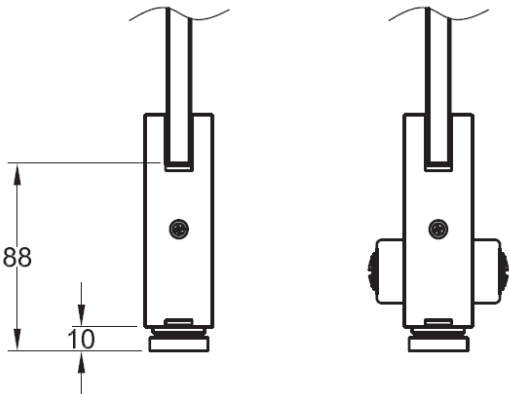

OPTIONAL BOTTOM RAIL - WITH OR WITHOUT LOCK

DETAILS

FINISHES


- GCC RS150 Kit for Ceiling Installation
- 150kg weight capacity for 10/12mm toughened glass
 - Suitable for door widths up to 1500mm
 - Refer to price list for track mounting bkts, end caps & bottom rails.
 - Email luke.pritchard@mfgs.com.au to order this or custom length kits.

- Natural Anodised
 - Other finishes may be available
- Base material: Aluminium

FRAMELESS GLASS SLIDING DOOR SYSTEMS

Sadev Med/Strong Single Door - Wall

Product Code	Type	Glass Door Width
89-000.1301	Med	Up to 950mm
89-000.1302		950mm to 1500mm
89-000.1201	Strong	Up to 950mm
89-000.1202		950mm to 1500mm

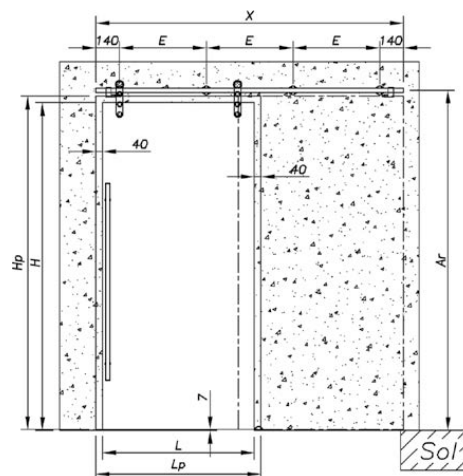

H: Opening height, Hp: Glass height, L: Opening width, Lp: Glass Width X: Total track length, Ar: Track Height

DETAILS

Sadev Medium/Strong Single Door Kits for Wall Installation

- Medium 80kg / Strong 150kg weight capacity for 8/10/12mm toughened glass
- No handles or Glass included with kits
- Email luke.pritchard@mfgs.com.au to order this or custom length kits.
- For further information please refer to download section at www.mfgs.com.au


FINISHES

- Satin
- Base material: 316 Stainless Steel

FRAMELESS GLASS SLIDING DOOR SYSTEMS

Sadev Med/Strong Double Door - Wall

Product Code	Type	Glass Opening Width
89-000.1305	Med	Up to 1800mm
89-000.1306		1800mm to 3000mm
89-000.1205	Strong	Up to 1800mm
89-000.1206		1800mm to 3000mm

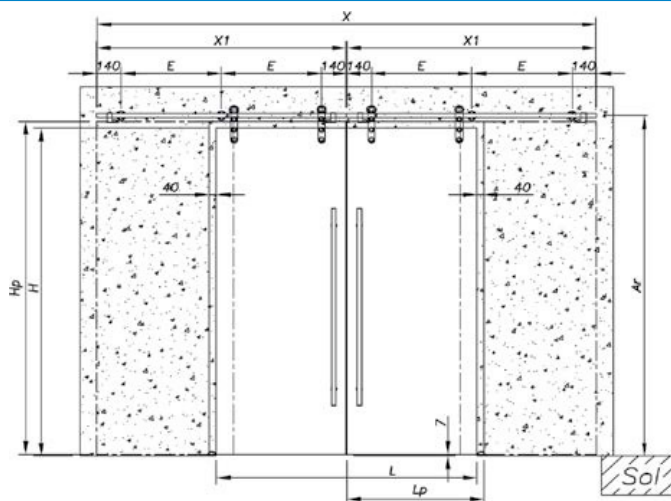

H: Opening height, Hp: Glass height, L: Opening width, Lp: Glass Width X: Total track length, Ar: Track Height

DETAILS

Sadev Medium/Strong Double Door Kits for Wall Installation

- Medium 80kg / Strong 150kg weight capacity for 8/10/12mm toughened glass
- No handles or Glass included with kits
- Email luke.pritchard@mfgs.com.au to order this or custom length kits.
- For further information please refer to download section at www.mfgs.com.au


FINISHES

- Satin
- Base material: 316 Stainless Steel

FRAMELESS GLASS SLIDING DOOR SYSTEMS

Sadev Med/Strong
Single Door - Glass

Product Code	Type	Glass Door Width
89-000.1303	Med	Up to 950mm
89-000.1304		950mm to 1500mm
89-000.1203	Strong	Up to 950mm
89-000.1204		950mm to 1500mm

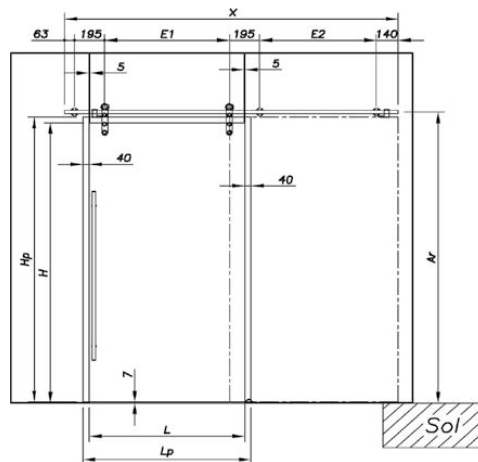

H: Opening height, Hp: Glass height, L: Opening width, Lp: Glass Width X: Total track length, Ar: Track Height

DETAILS

FINISHES

Sadev Medium/Strong Single Door Kits for Glass Installation

- Medium 80kg / Strong 150kg weight capacity for 8/10/12mm toughened glass
- No handles or Glass included with kits
- Email luke.pritchard@mfgs.com.au to order this or custom length kits.
- For further information please refer to download section at www.mfgs.com.au


- Satin

Base material: 316 Stainless Steel

FRAMELESS GLASS SLIDING DOOR SYSTEMS

Sadev Med/Strong
Double Door - Glass

Product Code	Type	Glass Opening Width
89-000.1307	Med	Up to 1800mm
89-000.1308		1800mm to 3000mm
89-000.1207	Strong	Up to 1800mm
89-000.1208		1800mm to 3000mm

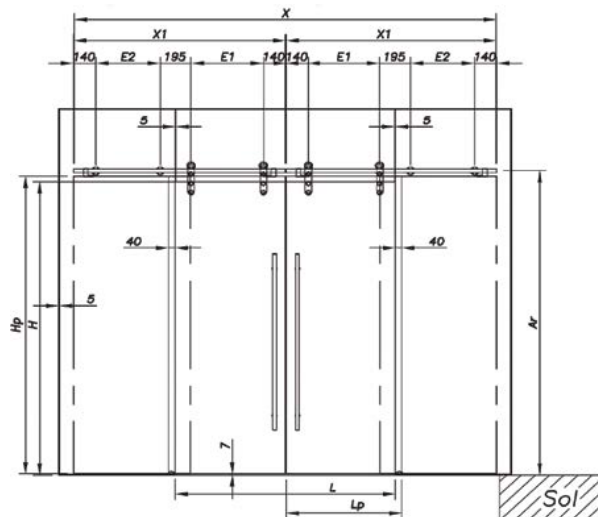

H: Opening height, Hp: Glass height, L: Opening width, Lp: Glass Width X: Total track length, Ar: Track Height

DETAILS

FINISHES

Sadev Medium/Strong Double Door Kits for Glass Installation



- Medium 80kg / Strong 150kg weight capacity for 8/10/12mm toughened glass
- No handles or Glass included with kits
- Email luke.pritchard@mfgs.com.au to order this or custom length kits.
- For further information please refer to download section at www.mfgs.com.au

- Satin

Base material: 316 Stainless Steel

FRAMELESS GLASS SLIDING DOOR SYSTEMS

GLW2450

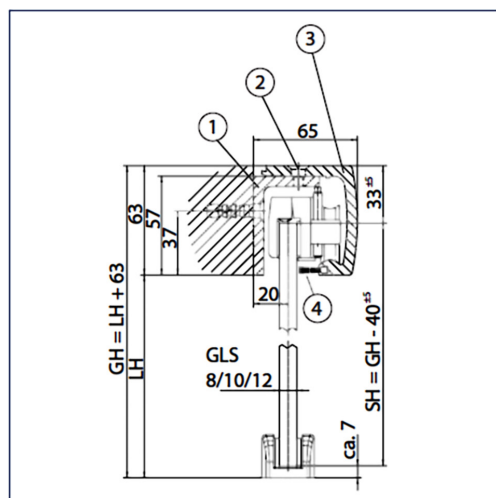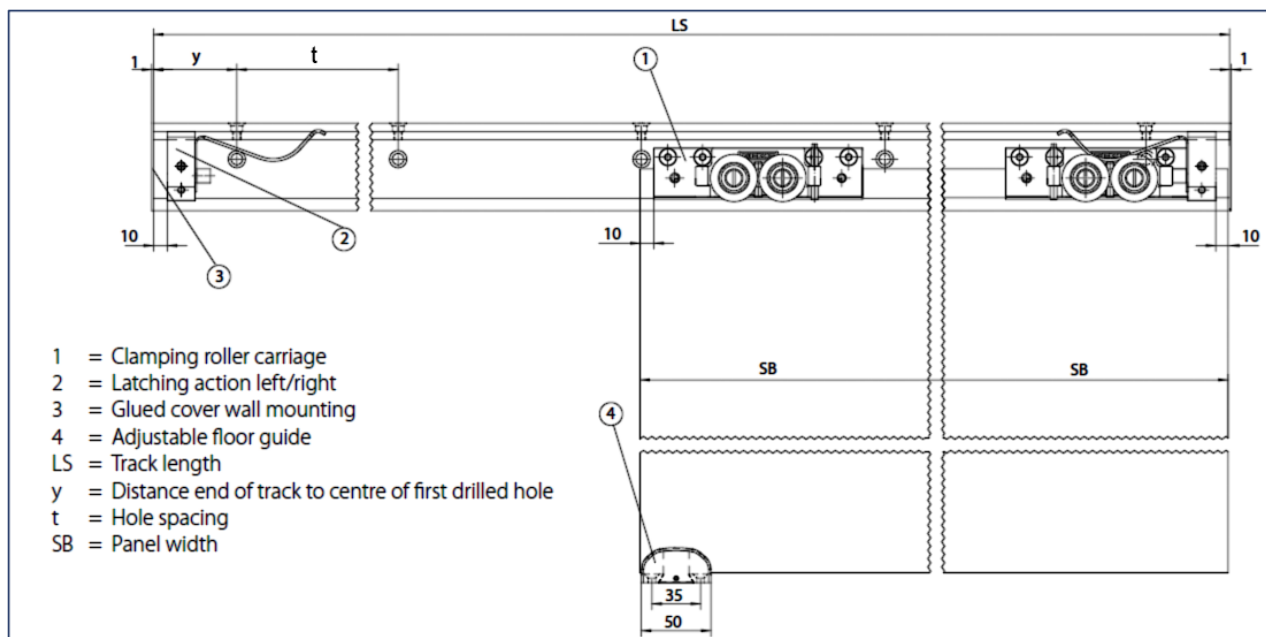

- 1 = Profile for wall mounting
- 2 = Screw DIN 7991 M6x12
- 3 = Profile for ceiling mounting
- 4 = Sealing brush
- LH = Clear height
- GLS = Thickness of glass
- SH = Panel height
- GH = Total height

GLW2450 Wall Installation Kit Includes:

- 1 x 2450mm track & wall bracket profile
- 2 x roller carriages
- 2 x buffers
- 2 x end covers
- 1 x brush seal
- 1 x adjustable floor guide
- No handle included

DETAILS

Geze Levolan 150 Wall Fix Kit

- 150kg weight capacity for 8/10/12mm toughened glass
- Suitable for door widths between 500 & 1240mm
- See page 4.9c for softstop details
- Email luke.pritchard@mfgs.com.au for custom length kits including those requiring spacer and/or fixed panel profile.
- For further information please refer to download section at www.mfgs.com.au



FINISHES

- Natural Anodised
- Satin Stainless Anodised

Base material: 316 Stainless Steel

GLC2450

FRAMELESS GLASS SLIDING DOOR SYSTEMS

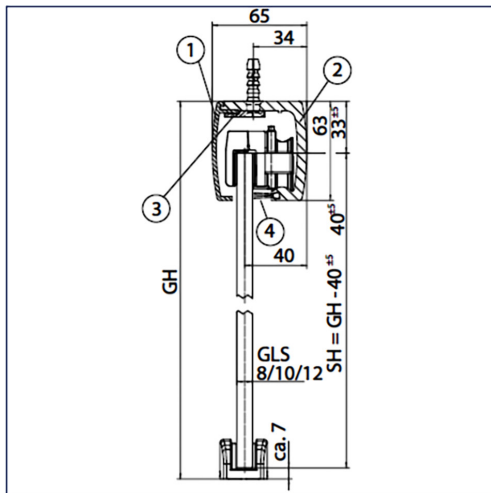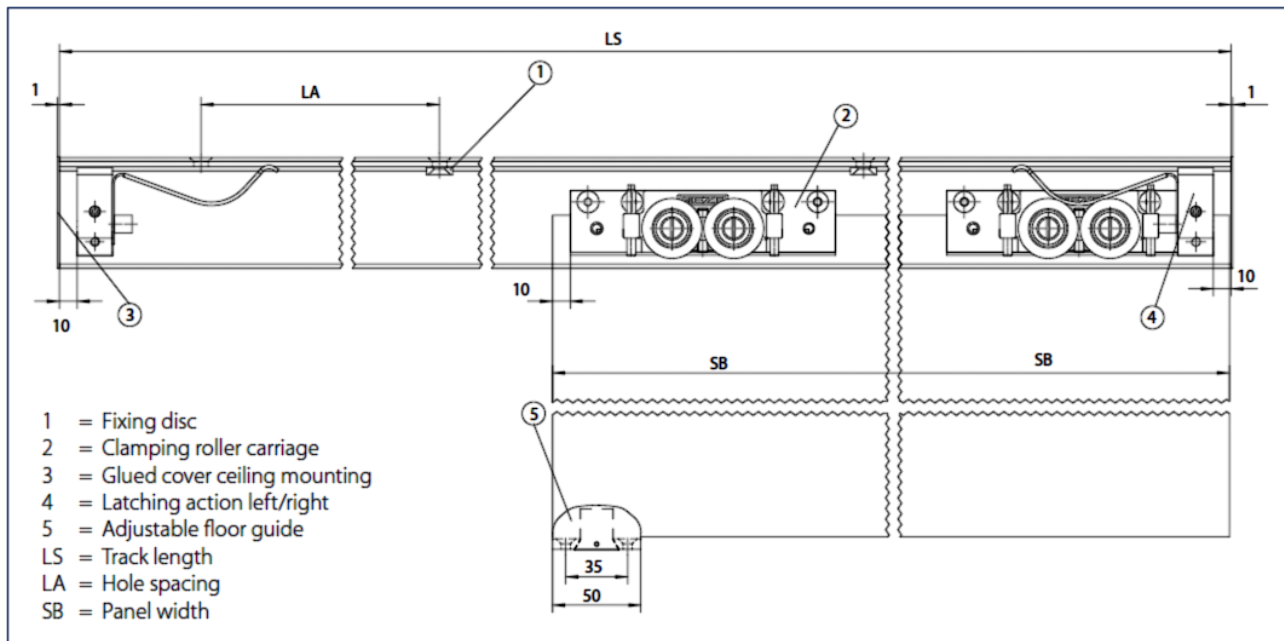

- 1 = Cover profile for ceiling mounting
2 = Profile for ceiling mounting
3 = Fixing disc
4 = Sealing brush
SH = Panel height
GH = Total height
GLS= Thickness of glass

GLC2450 Wall Installation Kit Includes:

- 1 x 2450mm track & cover profile
- 2 x roller carriages
- 2 x buffers
- 2 x end covers
- 1 x brush seal
- 1 x adjustable floor guide
- No handle included

DETAILS

Geze Levolan 150 Ceiling Flx Kit

- 150kg weight capacity for 8/10/12mm toughened glass
- Suitable for door widths between 500 & 1240mm
- See page 4.9c for softstop details
- Email luke.pritchard@mfgs.com.au for custom length kits including those requiring spacer and/or fixed panel profile.
- For further information please refer to download section at www.mfgs.com.au

FINISHES


- Natural Anodised
- Satin Stainless Anodised

Base material: 316 Stainless Steel


FRAMELESS GLASS SLIDING DOOR SYSTEMS

Geze Levolan 150 Softstops


With long glass leaf on both sides:

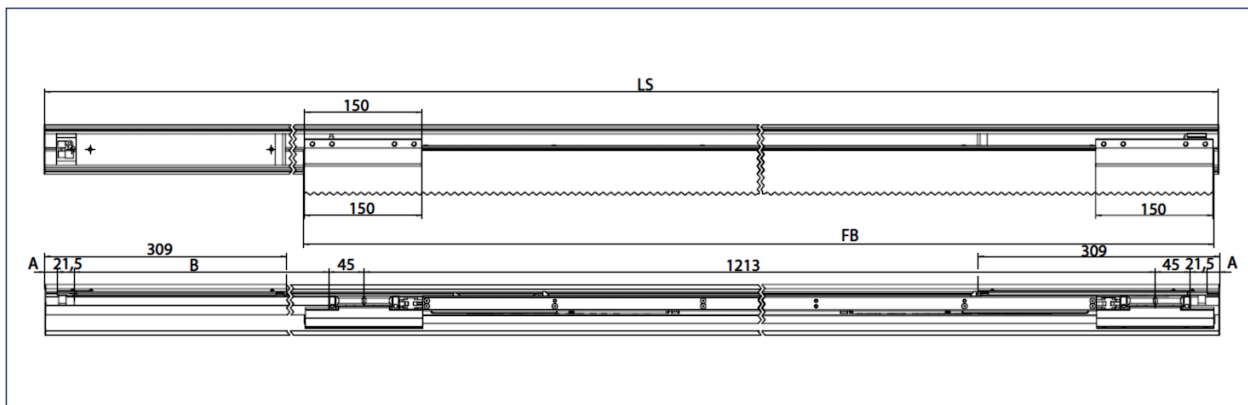

Mounting with glass leaf, damping in both directions, Levolan SoftStopDuo:

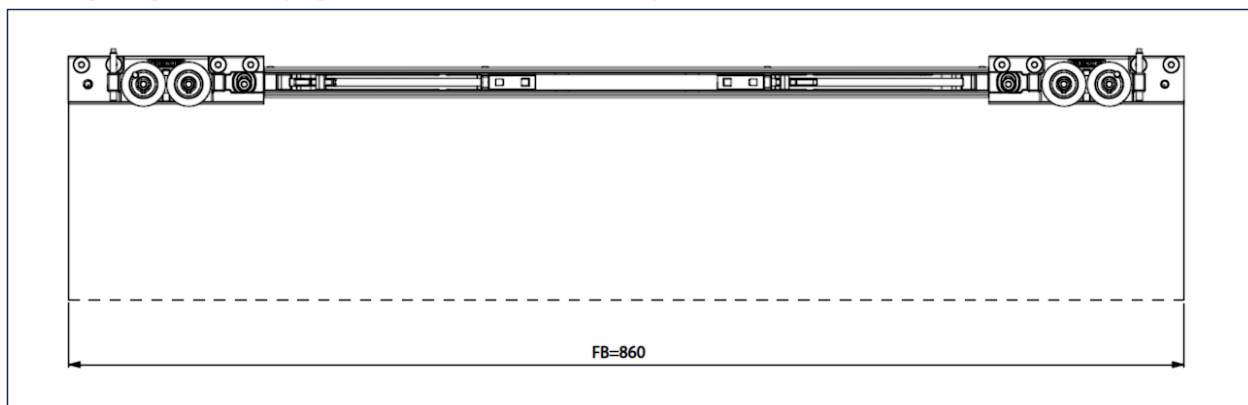

With glass leaf on one side, short:

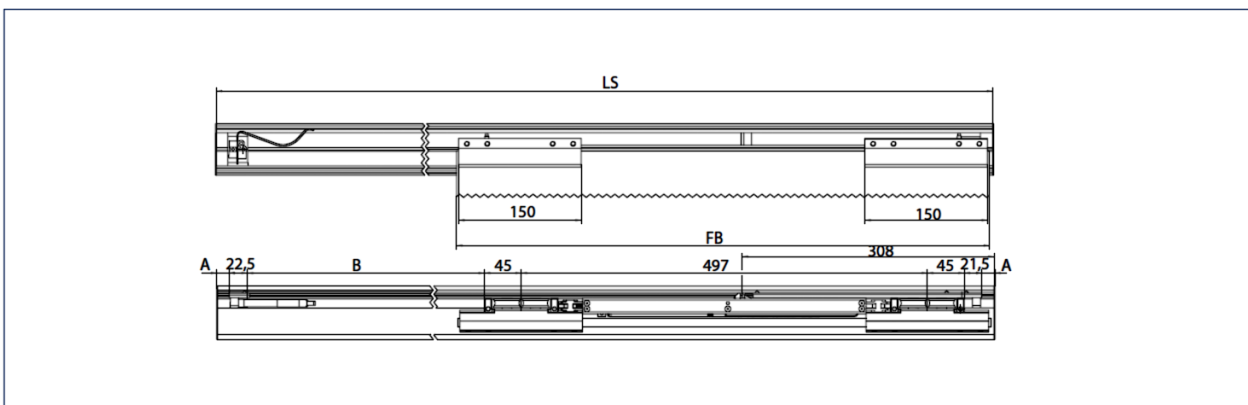




LS = Track length
FB = Leaf width

DETAILS

Geze Levolan 150 Softstops


- 80kg weight capacity
- GLSS Short Single Sided Version - 650mm to 1000mm Wide Door
- GLSM-S Medium Single Sided Version - 975mm to 1365mm Wide Door
- GLSM-D Duo Version - 860mm to 1365mm Wide Door
- GLSL-D Large Double Sided Version - 1365mm to 1700mm Wide Door
- For further information please refer to download section at www.mfgs.com.au

FINISHES

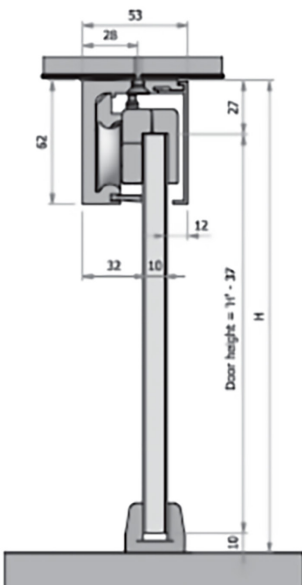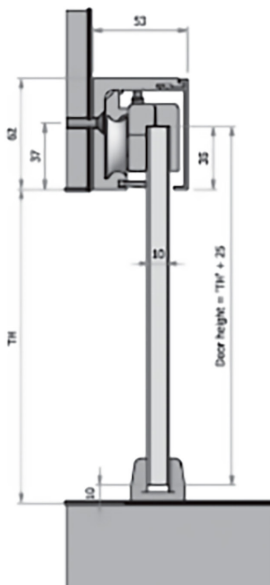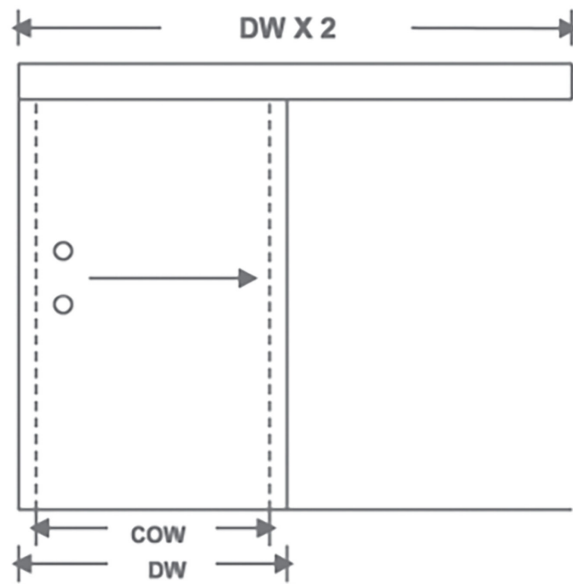GG.CW		FRAMELESS GLASS SLIDING DOOR SYSTEMS	
			
<p>Ceiling fix To determine door height H = Overall opening height DH = Glass door height DH = H less 37mm</p>		<p>Wall fix To determine door height TH = Opening height to underside of transom DH = Glass door height DH = TH plus 25mm</p>	
		<p>To determine door width COW = Clear opening width DW = Door width Doors typically overlap the clear opening by 35mm each side Eg. DW = COW + 70mm Track length is 2 x door width</p>	
DETAILS		FINISHES	
<p><u>Metro Glass Glide Ceiling or Wall Fix Kits</u></p> <ul style="list-style-type: none">150kg weight capacity for 10 or 12mm toughened glassEach kit contains: Track, Pelmet, Hangers, Stops, End Caps & Floor guide. GG.DK for extra hardware required on double doors.Kits available for door widths up to 1000mm and 1500mmEmail luke.pritchard@mfgs.com.au for custom length kits.For further information please refer to download section at www.mfgs.com.au		<ul style="list-style-type: none">Natural Anodised <p>Base material: Aluminium</p>	

FRAMELESS GLASS SLIDING DOOR SYSTEMS


GG.SP

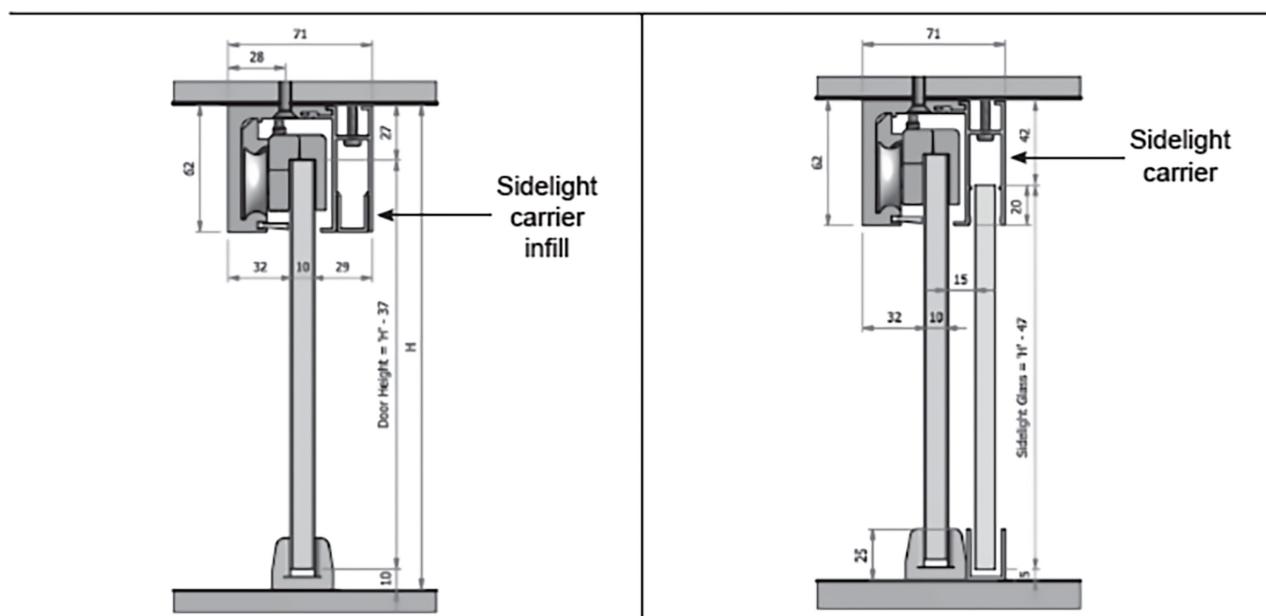

To determine the height of glass doors & sidelights

H = Overall opening height
DH = Glass door height
DH = H less 37mm

SL = Glass sidelight height
SL = H less 47mm

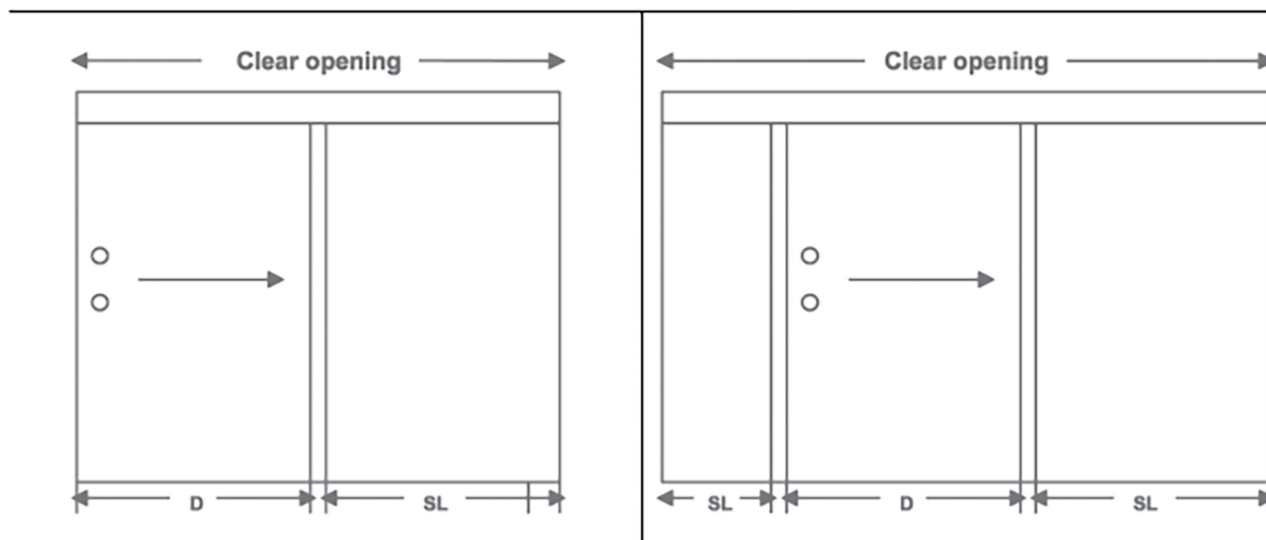

With the Metro Glass Glide sliding door & sidelight system there are numerous set out options.

Above are two of the more common options.

Note: It is recommended that the door and sidelight overlap be 35mm each side.

When glazing side lights specify CS25 channel.

DETAILS

Metro Glass Glide Ceiling or Wall Fix Kits with Sidelight Carrier


- 150kg weight capacity for 10 or 12mm toughened glass
- Each kit contains: Track, Sidelight Carrier, Sidelight Infill, Hangers, Stops, End Caps & Floor guide. GG.DK for extra hardware required on double doors.
- Kits available for door widths up to 1000mm and 1500mm
- Email luke.pritchard@mfgs.com.au for custom length kits.
- For further information please refer to download section at www.mfgs.com.au

FINISHES

- Natural Anodised
- Base material: Aluminium

ML100

FRAMELESS GLASS SLIDING DOOR SYSTEMS

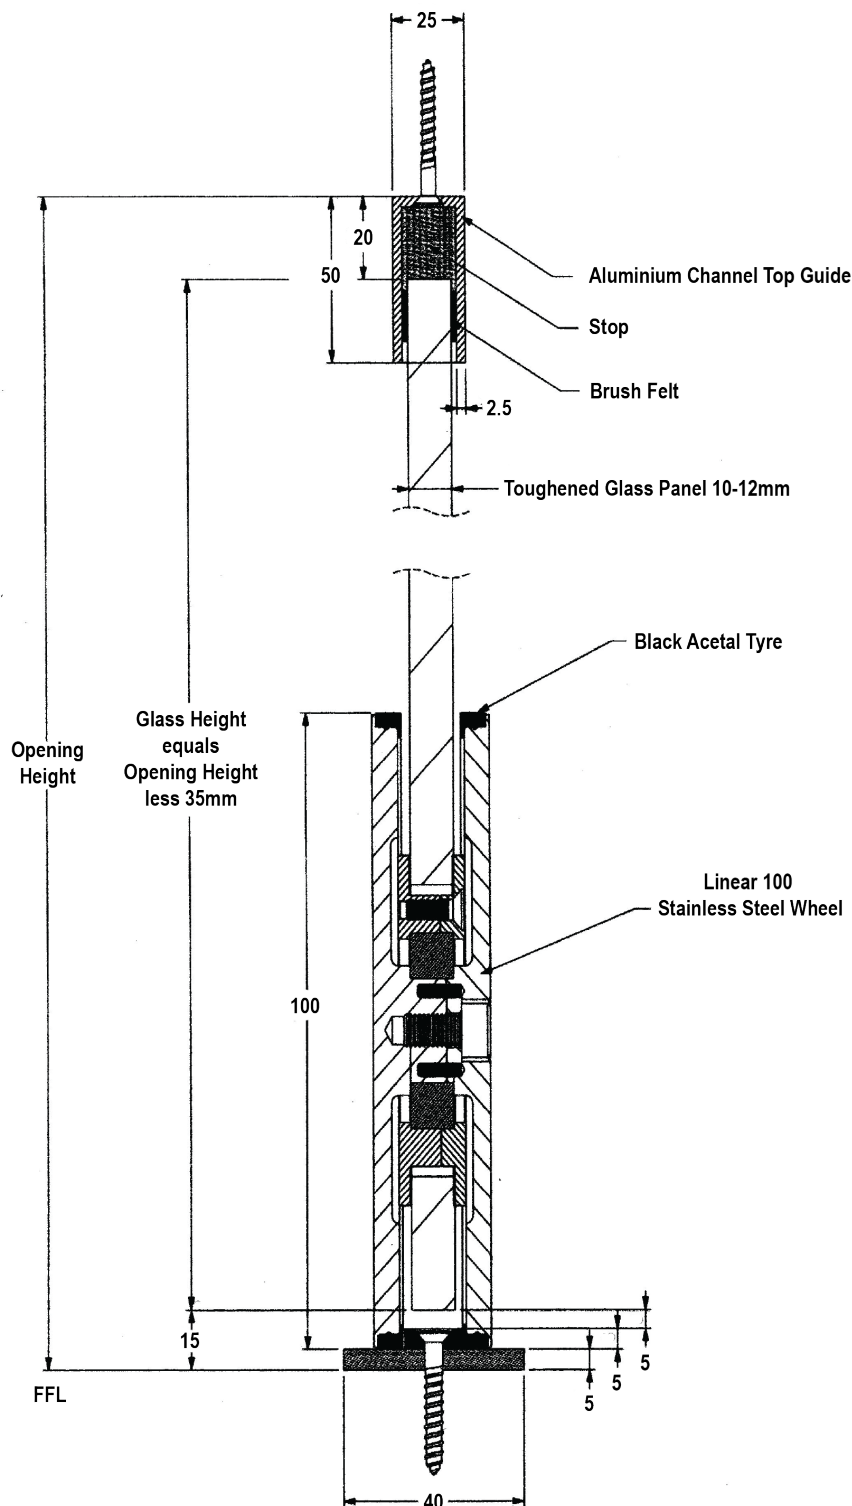

DETAILS

Metro Linear 100


- 170kg weight capacity for 10 or 12mm toughened glass
- Each kit contains: Bottom Track, Top Channel Guide & 2 x Stops and 2 x Wheels
- Kits available for door widths up to 1000mm and 1500mm
- Side mount channel fittings available upon request
- The system can be used in single, bi-parting and multiple lines of sliding doors
- For further information please refer to download section at www.mfgs.com.au

FINISHES

- Natural Anodised Top Channel Guide & Bottom Track
 - Satin Wheels
- Base material:
Aluminium Top Channel Guide
& Bottom Track
Stainless Steel Wheels

FRAMELESS GLASS SLIDING DOOR SYSTEMS


ML100 Glass Preparation

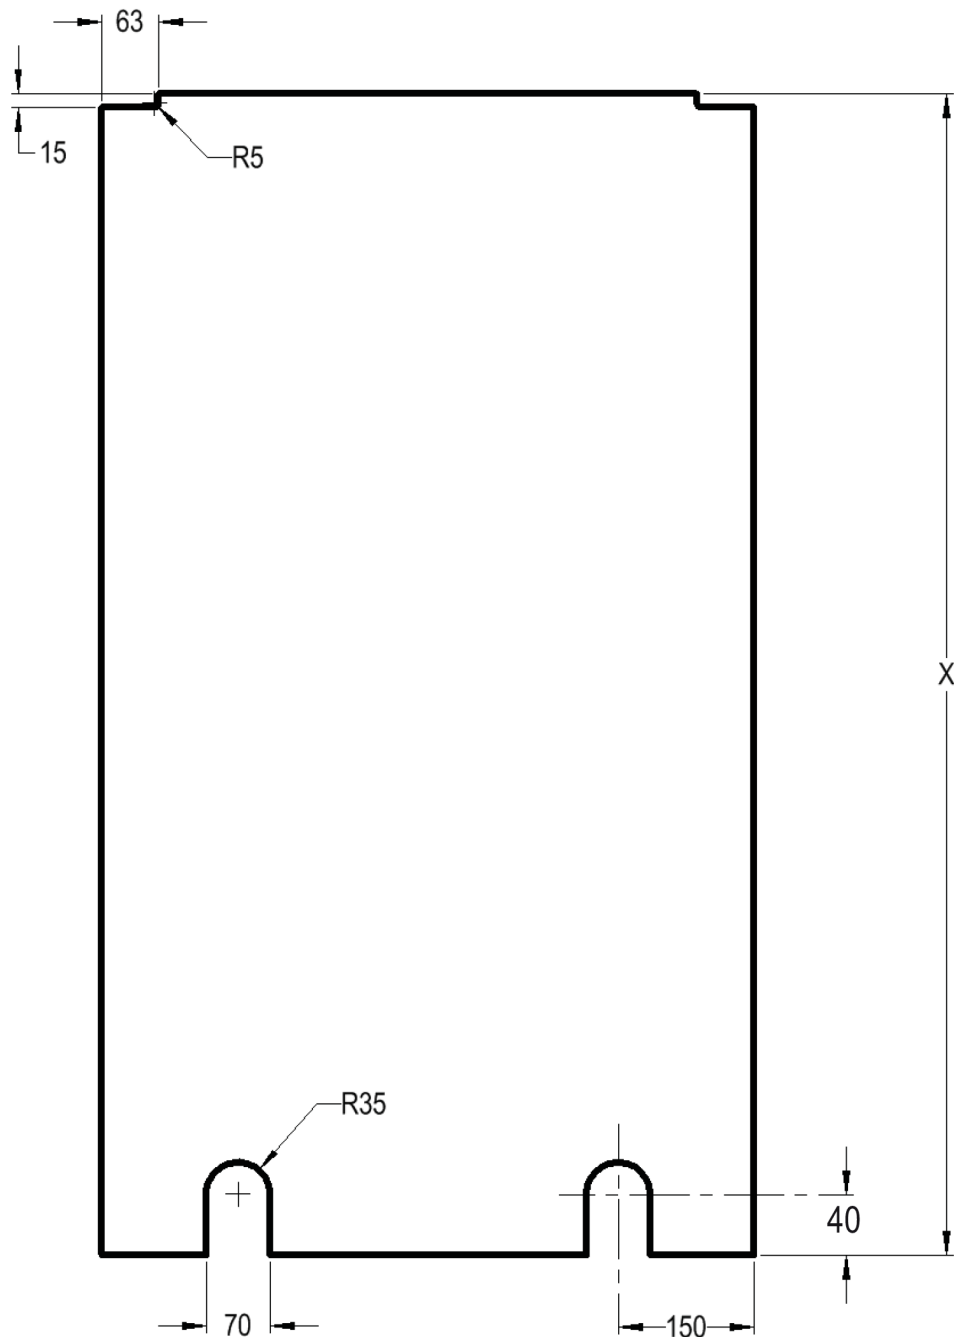

X = height of door which is finished opening height less 35mm

MRS100/200


FRAMELESS GLASS SLIDING DOOR SYSTEMS

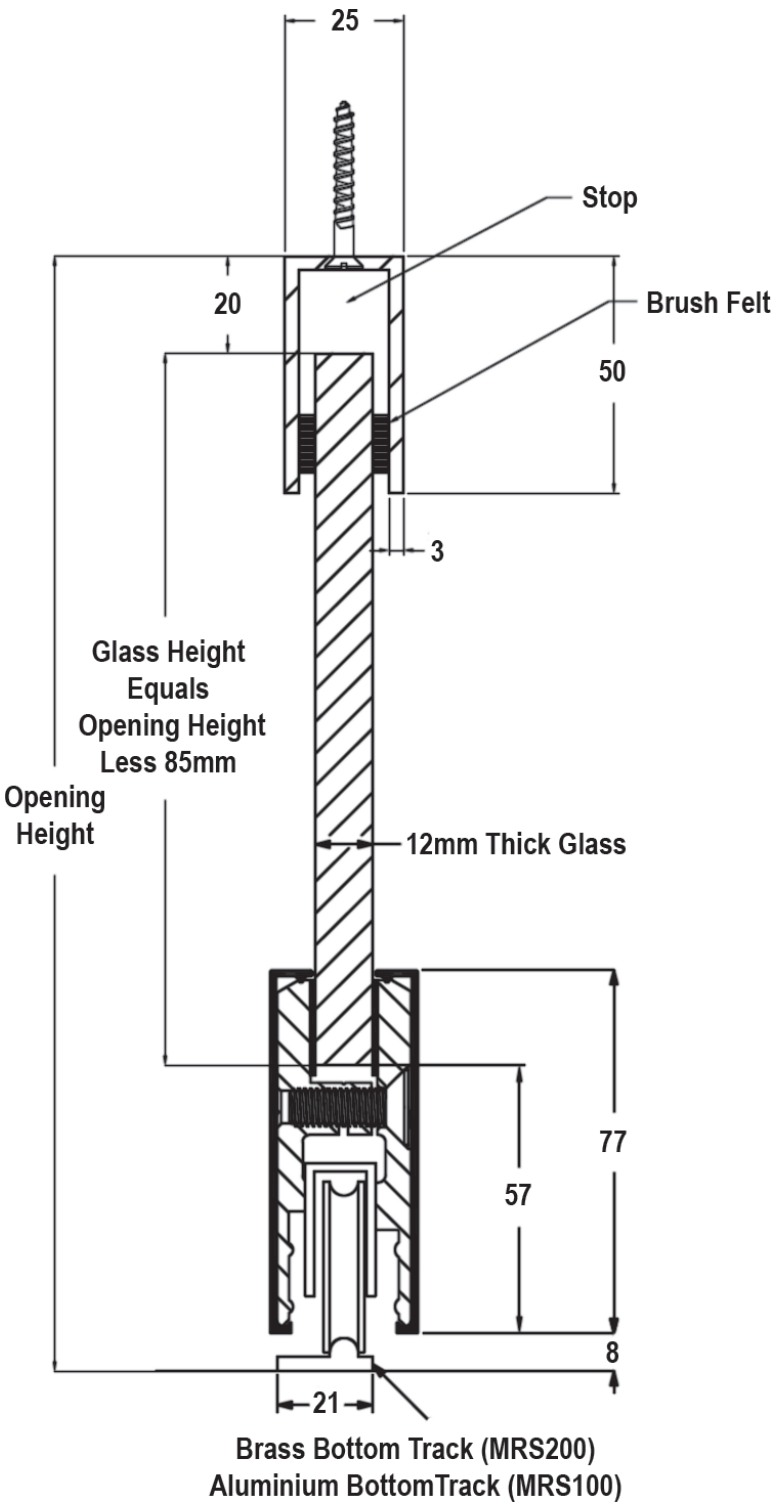

DETAILS	FINISHES
<p><u>Metro MRS100/200</u></p> <ul style="list-style-type: none">• 100/200kg weight capacity for 10 or 12mm toughened glass• Each kit contains: Track, bottom sliding door rail, top guide channel & 2 x stops• Kits available for door widths up to 1000/1500/2000/3000mm• Email luke.pritchard@mfgs.com.au for custom lengths in single, bi-parting, multiple lines of sliding doors, stainless wheels & the addition of bottom rails.• For further information please refer to download section at www.mfgs.com.au	<ul style="list-style-type: none">• NA Top Channel Guide & Bottom Sliding Rail Covers & track for MRS100 <p>Base material:</p> <p>Aluminium Top Channel Guide, Bottom Sliding Rail & track for MRS100</p> <p>Raw Brass Bottom Track for MRS200</p> <p>Nylon Wheels</p>


FRAMELESS GLASS SLIDING DOOR SYSTEMS

MRS100/200 Glass Preparation

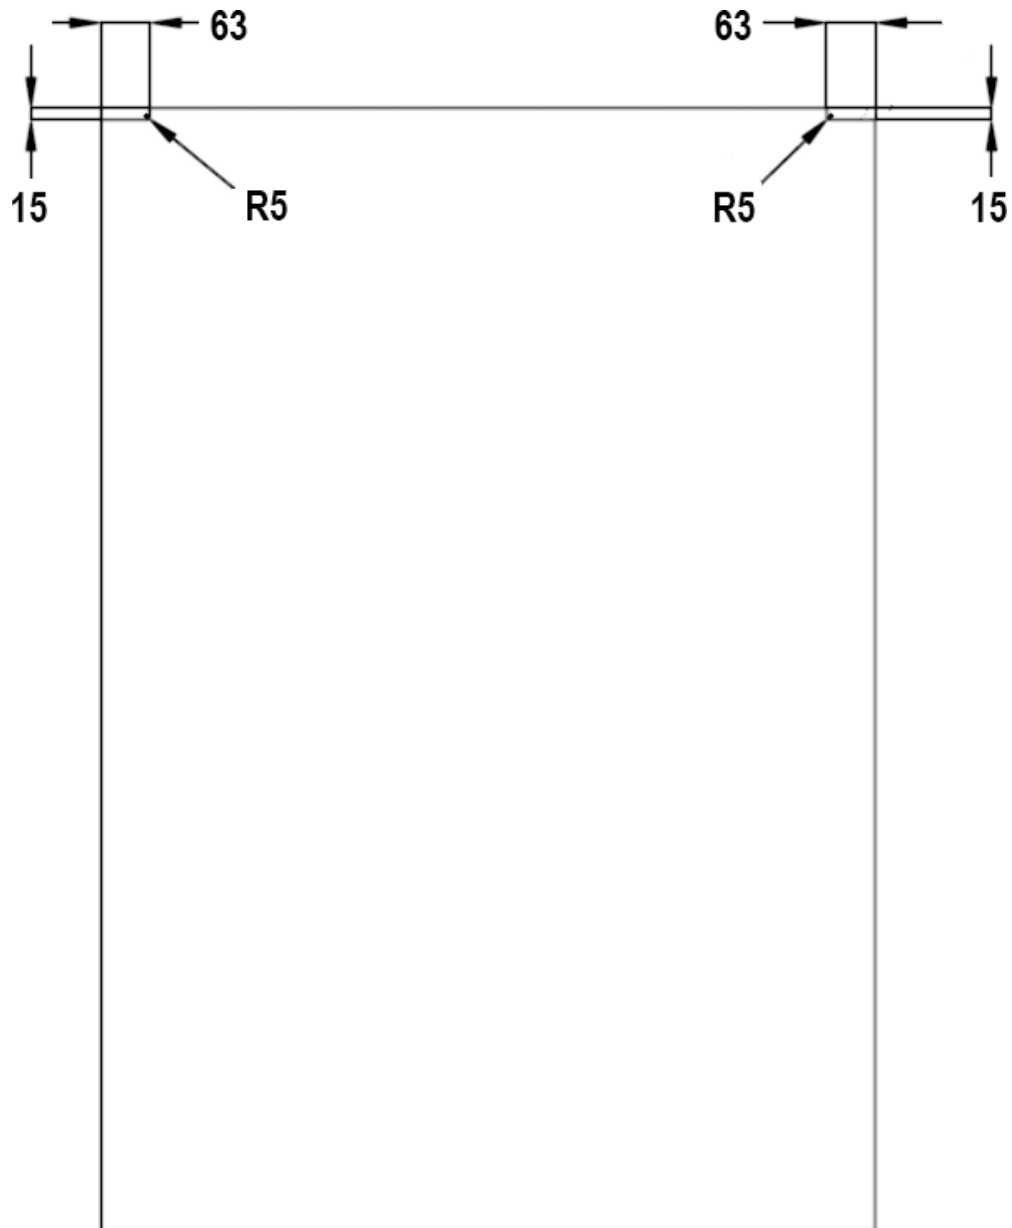

ML153

FRAMELESS GLASS SLIDING DOOR SYSTEMS

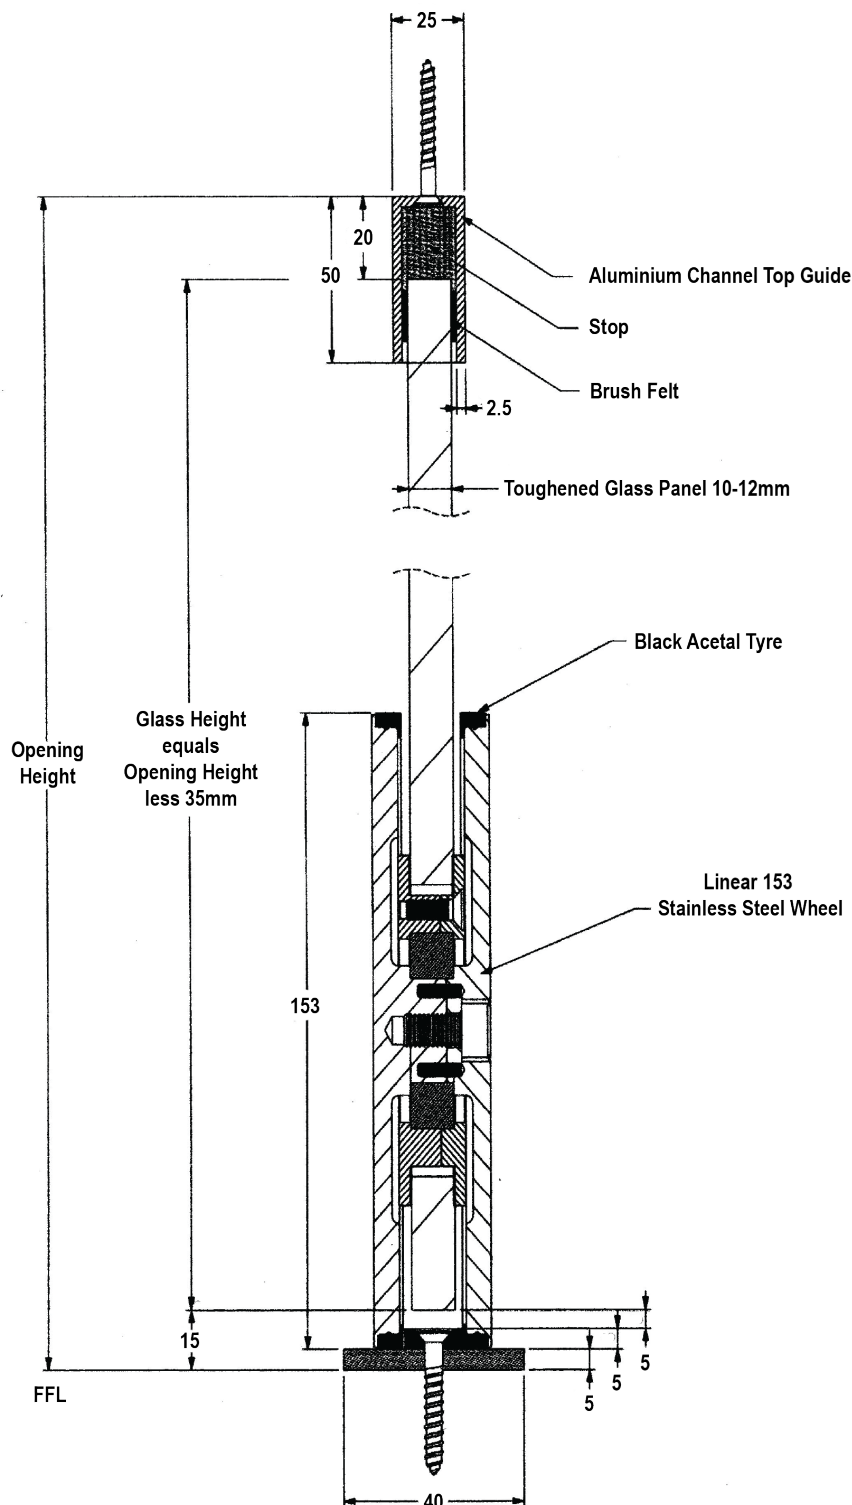

DETAILS


Metro Linear 153

- 250kg weight capacity for 10 or 12mm toughened glass
- Each kit contains: Bottom Track, Top Channel Guide & 2 x Stops and 2 x Wheels
- Kits available for door widths up to 1000mm and 1500mm
- Side mount channel fittings available upon request
- The system can be used in single, bi-parting and multiple lines of sliding doors
- For further information please refer to download section at www.mfgs.com.au

FINISHES

- Natural Anodised Top Channel Guide & Bottom Track
 - Satin Wheels
- Base material:
Aluminium Top Channel Guide
& Bottom Track
Stainless Steel Wheels


FRAMELESS GLASS SLIDING DOOR SYSTEMS

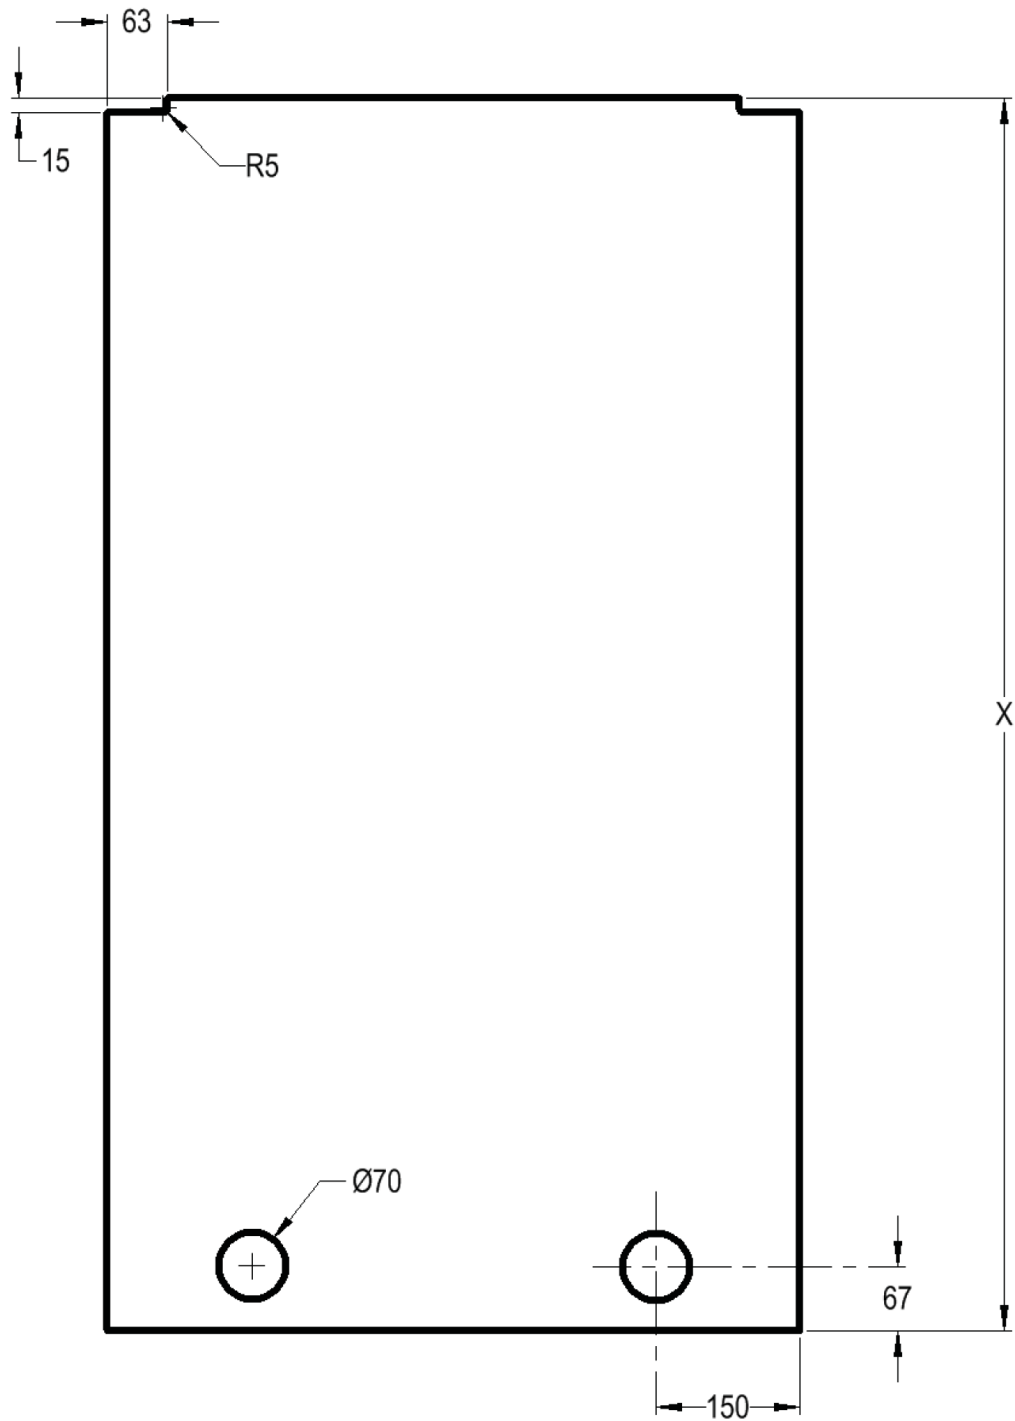


X = height of door which is finished opening height less 35mm

MF100

FRAMELESS GLASS SLIDING DOOR SYSTEMS

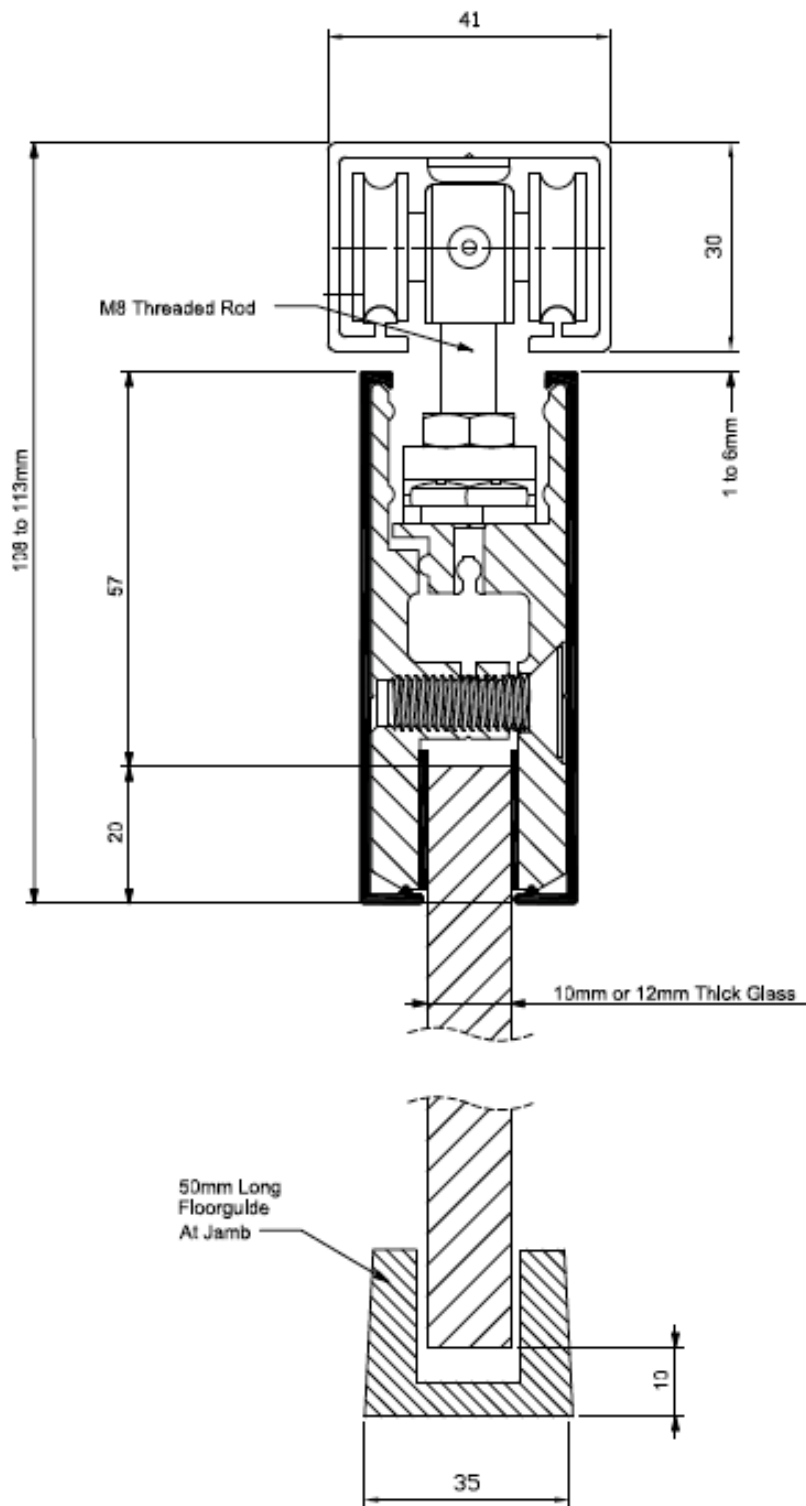

DETAILS	FINISHES
<p><u>Metro MF100</u></p> <ul style="list-style-type: none">• 100kg weight capacity for 10 or 12mm toughened glass• Each kit contains: Top Track/Stops, Roller Hangers, Top Door Rail/Hanger Blocks & Floor Guide for door widths up to 1000mm, 1500mm & 2000mm• Email manufactured@mfgs.com.au for custom lengths in single, bi-parting, multiple lines of sliding doors, using patch fittings rather than door rails, stainless wheels & the addition of bottom rails.	<ul style="list-style-type: none">• Natural Anodised• Other finishes may be available <p>Base material: Aluminium Top Track & Door Rail</p>

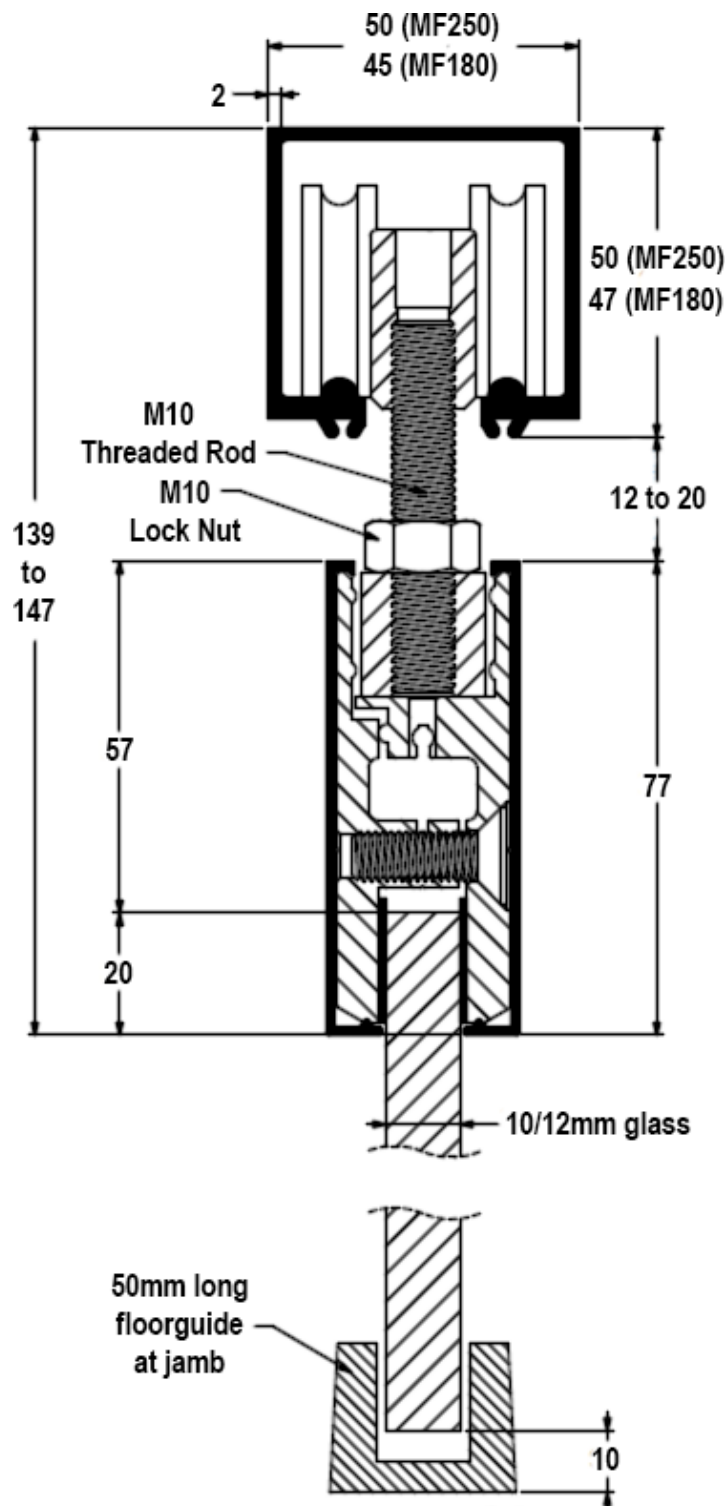FRAMELESS GLASS SLIDING DOOR SYSTEMS
MF180/250

DETAILS
Metro MF180/250

- 180/250kg weight capacity for 10 or 12mm toughened glass
- Each kit contains: Top Track/Stops, Roller Hangers, Top Door Rail/Hanger Blocks & Floor Guide for door widths up to 1000mm, 1500mm & 2000mm
- Email manufactured@mfgs.com.au for custom lengths in single, bi-parting, multiple lines of sliding doors, using patch fittings rather than door rails, stainless wheels & the addition of bottom rails.

FINISHES

- Natural Anodised
- Other finishes may be available

Base material:
Aluminium Top Track
& Door Rail

INTENTIONALLY

LEFT


BLANK

FRAMELESS GLASS SLIDING DOOR SYSTEMS
**MP300H
MP300H/SS**


Product Image

Dimensions of
patch same as
MP300
on page 3.9e

Dimensions

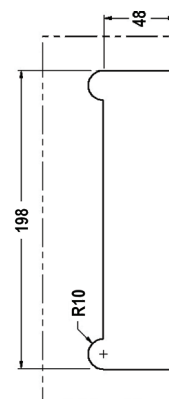

Glass Preparation

DETAILS
Sliding Door Patch Lock

- Suitable for 10mm & 12mm glass
- Complete with cylinder/snib & hook mortice lock
- MP300H/SS has a zinc passivated, die cast & stainless steel internals & stainless steel mortice lock throw
- Email luke.pritchard@mfgs.com.au to order

FINISHES

- Polished
- Satin
- Other finishes may be available


Base material:
Aluminium Body
304 Stainless Steel Covers

FRAMELESS GLASS SLIDING DOOR SYSTEMS
MP320H


Product Image

Dimensions of
patch same as
MP300
on page 3.9e

Dimensions

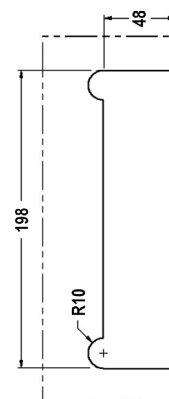

Glass Preparation


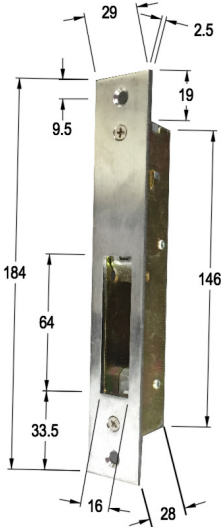



DETAILS
Sliding Door Patch Lock Keeper

- Suitable for 10mm & 12mm glass
- For MP300H
- Email luke.pritchard@mfgs.com.au to order

FINISHES

- Polished
- Satin
- Other finishes may be available

Base material:
Aluminium Body
304 Stainless Steel Covers

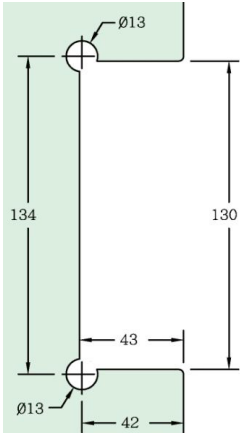
MK590-H		FRAMELESS GLASS SLIDING DOOR SYSTEMS	
<div>Product Image</div> 		<div>Dimensions</div> 	
DETAILS		FINISHES	
<div>Wall Mount Strike Box</div> <ul style="list-style-type: none">Used with MP300H & MP300H/SSEmail luke.pritchard@mfgs.com.au to order		<ul style="list-style-type: none">PolishedSatin <div>Base material: Steel Body 304 Stainless Steel Cover</div>	
MP200H		FRAMELESS GLASS SLIDING DOOR SYSTEMS	
<div>Product Image</div> 		<div>Dimensions</div> 	<div>Glass Preparation (choice of two)</div> 
DETAILS		FINISHES	
<div>Sliding Door Hook Patch Lock</div> <ul style="list-style-type: none">Suitable for 10mm & 12mm glassComplete with cylinder/snib & keeperWill also suit an MP200 cutout with adjustment, see page 3.9d		<ul style="list-style-type: none">PolishedSatin <div>Base material: Aluminium Body 304 Stainless Steel Covers</div>	

FRAMELESS GLASS SLIDING DOOR SYSTEMS
MP220H


Product Image



Dimensions

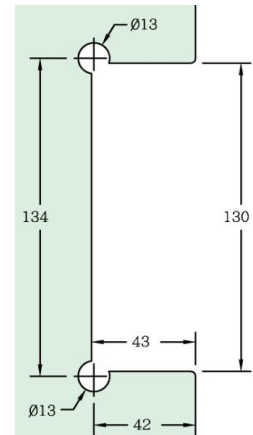

Glass Preparation (choice of two)


DETAILS
Glass Keeper

- Suitable for 10mm & 12mm glass
- For MP200H
- Will also suit an MP220 cutout with adjustment, see page 3.9d


FINISHES

- Polished
- Satin

Base material:
Aluminium Body
304 Stainless Steel Covers

FRAMELESS GLASS SLIDING DOOR SYSTEMS
SDFP60


Product Image



Dimensions

**50mm
Diameter
Hole**

Glass Preparation




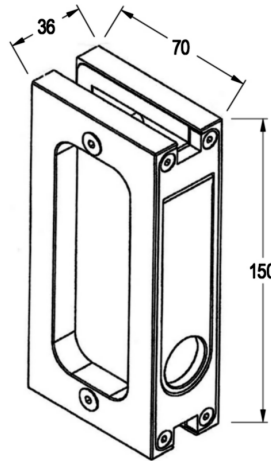
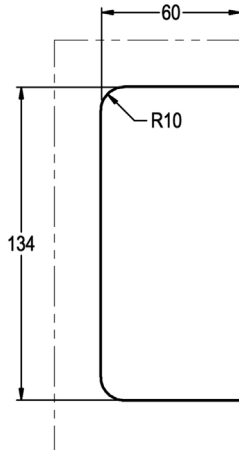
DETAILS
Sliding Door Finger Pull

- Suitable for 10mm & 12mm glass

FINISHES


- Polished
- Satin

Base material: 316 Stainless Steel


SDFP70		FRAMELESS GLASS SLIDING DOOR SYSTEMS	
			
Product Image		55mm Diameter Hole	
Dimensions		Glass Preparation	
DETAILS		FINISHES	
<u>Sliding Door Finger Pull</u> <ul style="list-style-type: none"> Suitable for 10mm & 12mm glass 		<ul style="list-style-type: none"> Polished Satin <p>Base material: 316 Stainless Steel</p>	
FP150		FRAMELESS GLASS SLIDING DOOR SYSTEMS	
			
Product Image			
Dimensions		Glass Preparation	
DETAILS		FINISHES	
<u>Sliding Door Flush Pull</u> <ul style="list-style-type: none"> Suitable for 10mm & 12mm glass Handle with ring pull for cavity installation 		<ul style="list-style-type: none"> Satin <p>Base material: 316 Stainless Steel</p>	

FRAMELESS GLASS SLIDING DOOR SYSTEMS
**E07N037
E07N047**


Product Image

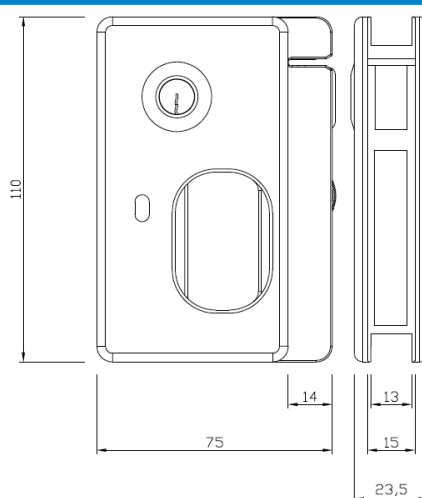

Dimensions

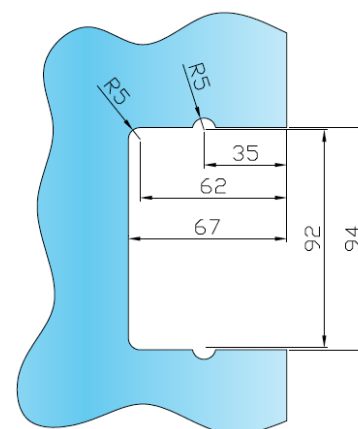

Glass Preparation

DETAILS
GFS T-Lock

- Suitable for 8/10/12mm glass for Cavity Installation
- Righthand = E07N037 & Lefthand = E07N047
- Automatic coupling
- Can be locked from the outside but always open from the inside
- In case of internal locking it is equipped with a safety mechanism
- The drapping trigger allows the door to sit flush with the frame


FINISHES

- Polished Chrome
- Satin Stainless Similar
- Other finishes may be available


 Base material:
Aluminium & Stainless Steel

FRAMELESS GLASS SLIDING DOOR SYSTEMS
E07N907


Product Image

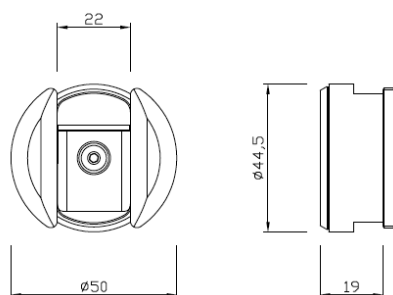

Dimensions

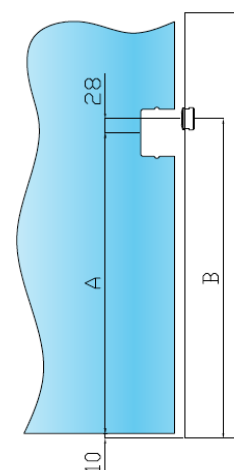

Glass Preparation


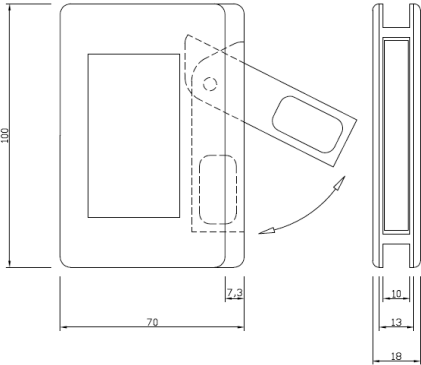
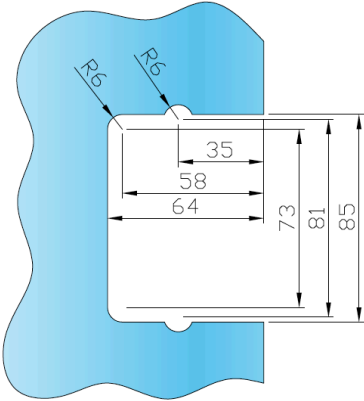
DETAILS
GFS Wall Keeper T-Lock

- Self adjusting to the natural setting of the door
- Hole Receiver on post 45mm Diameter
- Calculation of the height for the hole receiver $B = A + 38\text{mm}$

FINISHES

- Polished Chrome
- Satin Stainless Similar
- Other finishes may be available

 Base material:
Aluminium & Stainless Steel

E07M026 FRAMELESS GLASS SLIDING DOOR SYSTEMS		
		
Product Image	Dimensions	Glass Preparation
DETAILS		FINISHES
<p><u>GFS Sliding Door Flushpull</u></p> <ul style="list-style-type: none">• Suitable for 8/10mm glass for Cavity Installation• The drapping trigger allows the door to sit flush with the frame		<ul style="list-style-type: none">• Polished Chrome• Satin Stainless Similar• Other finishes may be available <p>Base material: Brass</p>